

# Chapter 10

## Rotation



## 10.2 The Rotational Variables


A **rigid body** is a body that can rotate with all its parts locked together and without any change in its shape.

A **fixed axis** means that the rotation occurs about an axis that does not move.




Figure skater Sasha Cohen in motion of pure rotation about a vertical axis. (*Elsa/Getty Images, Inc.*)

# 10.2 The Rotational Variables

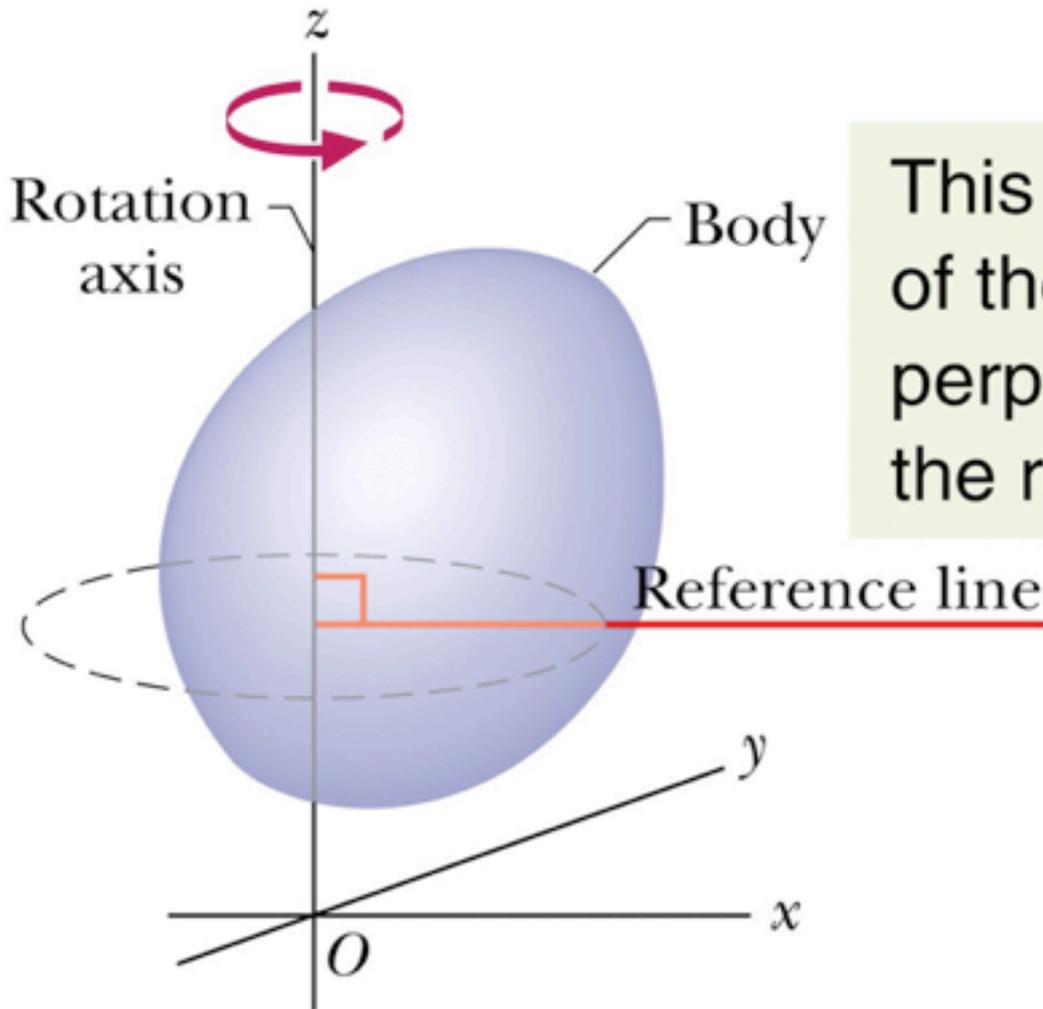

This line is part of the body and perpendicular to the rotation axis.

## 10.2 The Rotational Variables: Angular Position

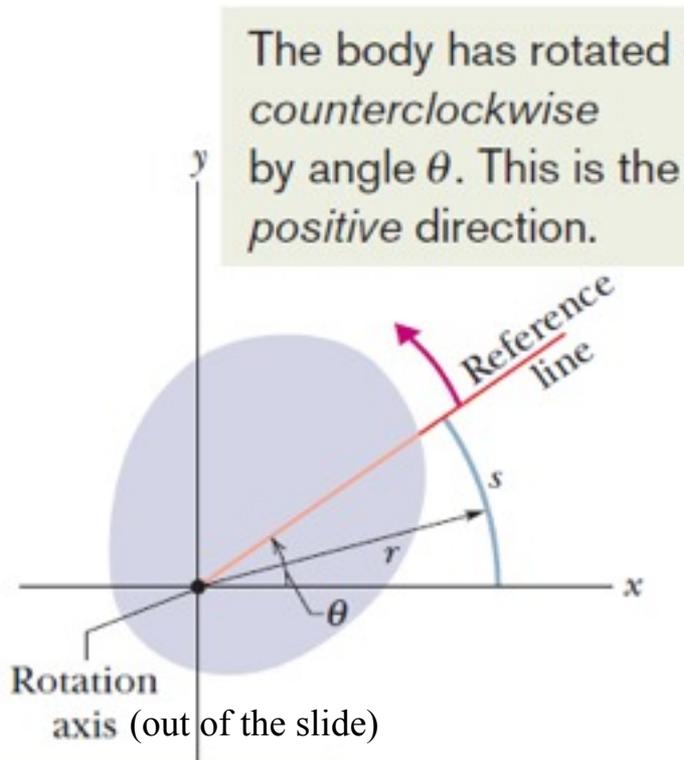

This dot means that the rotation axis is out toward you.

We have seen this before! Hence we will go fast here. Recall our discussion of circular motion.

$$\theta = \frac{s}{r} \quad (\text{radian measure}).$$

Here  $s$  is the length of a circular arc that extends from the  $x$  axis (the zero angular position) to the reference line, and  $r$  is the radius of the circle.

An angle defined in this way is measured in **radians (rad)**.


$$1 \text{ rev} = 360^\circ = \frac{2\pi r}{r} = 2\pi \text{ rad},$$

$$1 \text{ rad} = 57.3^\circ = 0.159 \text{ rev}.$$

## 10.2 The Rotational Variables: Angular Displacement

If a body rotates about the rotation axis, changing the angular position of the reference line from  $\theta_1$  to  $\theta_2$ , the body undergoes an angular displacement  $\Delta\theta$  given by

$$\Delta\theta = \theta_2 - \theta_1.$$

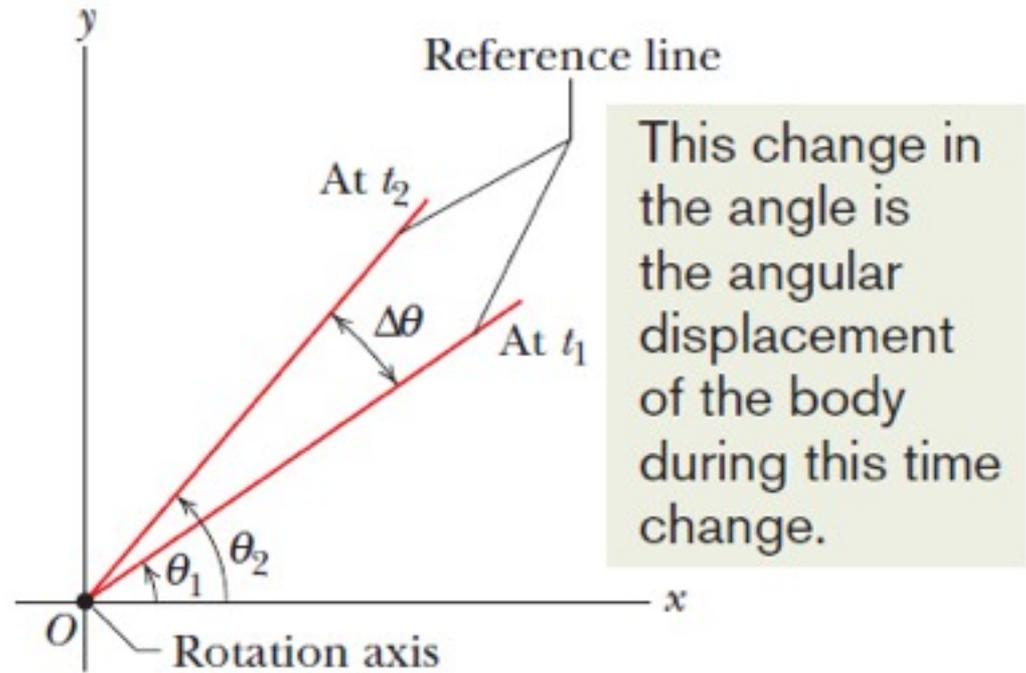

*An angular displacement in the counterclockwise direction is positive, and one in the clockwise direction is negative.*


## 10.2 The Rotational Variables: Angular Velocity

Suppose that our rotating body is at angular position  $\theta_1$  at time  $t_1$  and at angular position  $\theta_2$  at time  $t_2$ . Then the average angular velocity of the body in the time interval  $\Delta t = t_2 - t_1$  from  $t_1$  to  $t_2$  to be

$$\omega_{\text{avg}} = \frac{\theta_2 - \theta_1}{t_2 - t_1} = \frac{\Delta\theta}{\Delta t},$$

The instantaneous angular velocity  $\omega$  is the limit of the ratio as  $\Delta t$  approaches zero.

$$\omega = \lim_{\Delta t \rightarrow 0} \frac{\Delta\theta}{\Delta t} = \frac{d\theta}{dt}.$$

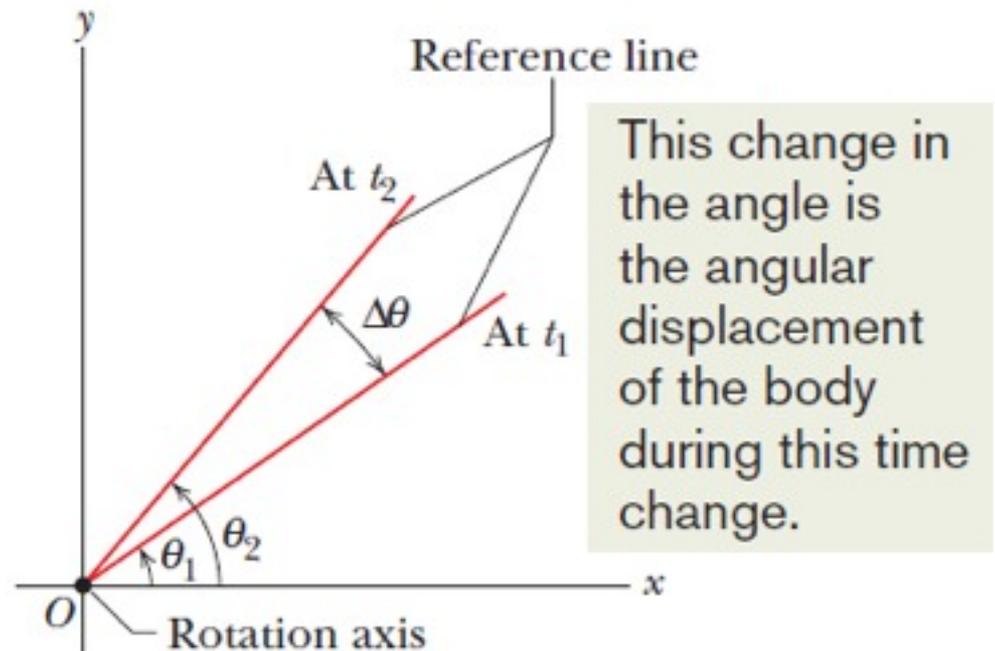

## 10.2 The Rotational Variables: Angular Acceleration

If the angular velocity of a rotating body is not constant, then the body has an angular acceleration.

If  $\omega_2$  and  $\omega_1$  be its angular velocities at times  $t_2$  and  $t_1$ , respectively, then the average angular acceleration of the rotating body in the interval from  $t_1$  to  $t_2$  is defined as

$$\alpha_{\text{avg}} = \frac{\omega_2 - \omega_1}{t_2 - t_1} = \frac{\Delta\omega}{\Delta t},$$

The instantaneous angular acceleration  $\alpha$ , is the limit of this quantity as  $\Delta t$  approaches zero.

$$\alpha = \lim_{\Delta t \rightarrow 0} \frac{\Delta\omega}{\Delta t} = \frac{d\omega}{dt}.$$

These relations hold for every particle of that body. The unit of angular acceleration is (rad/s<sup>2</sup>).


## Sample Problem

The disk in Fig. 10-5*a* is rotating about its central axis like a merry-go-round. The angular position  $\theta(t)$  of a reference line on the disk is given by

$$\theta = -1.00 - 0.600t + 0.250t^2, \quad (10-9)$$


with  $t$  in seconds,  $\theta$  in radians, and the zero angular position as indicated in the figure.


(a) Graph the angular position of the disk versus time from  $t = -3.0$  s to  $t = 5.4$  s. Sketch the disk and its angular position reference line at  $t = -2.0$  s, 0 s, and 4.0 s, and when the curve crosses the  $t$  axis.

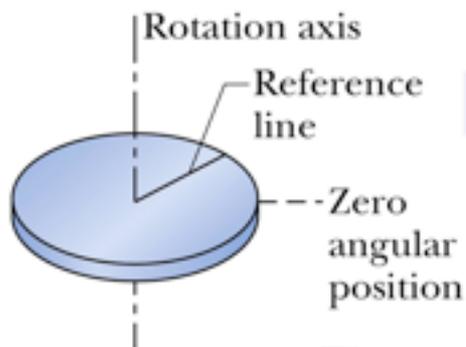

**Fig. 10-5**


(a) The angular position of the disk is the angle between these two lines.

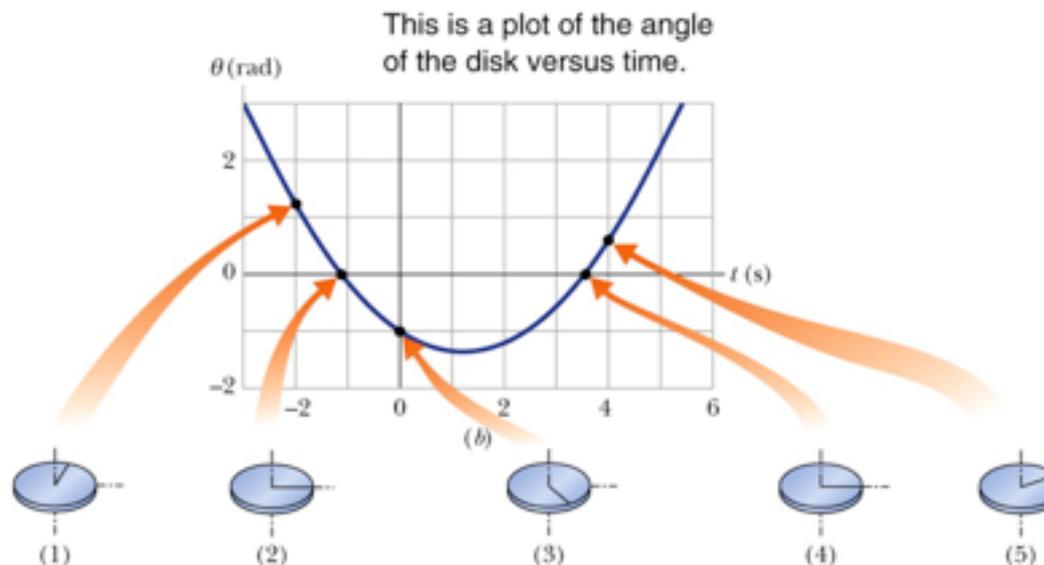

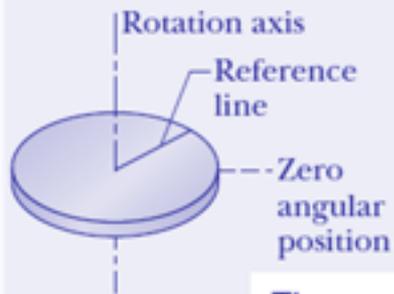

**Fig. 10-5**

(a) The angular position of the disk is the angle between these two lines.

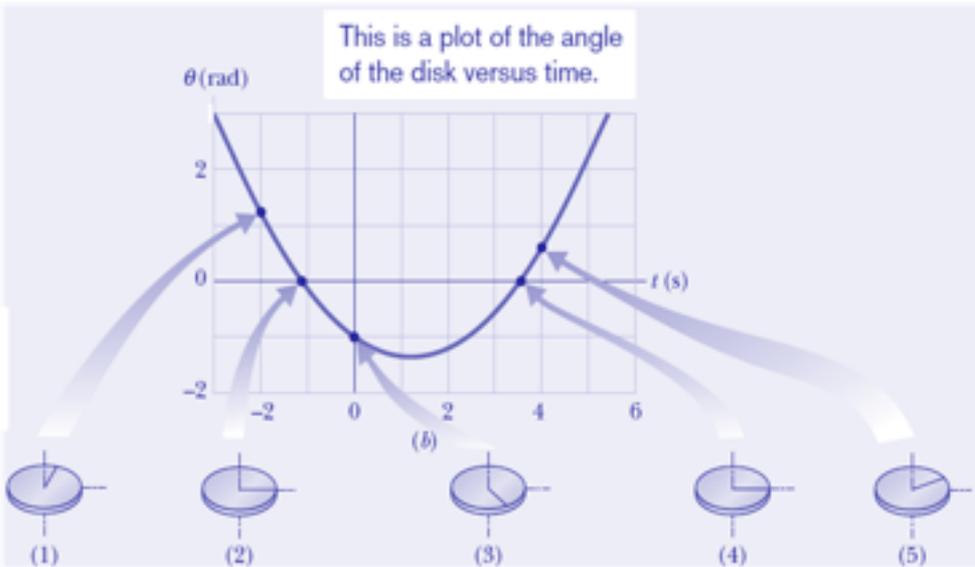

The disk in Fig. 10-5a is rotating about its central axis like a merry-go-round. The angular position  $\theta(t)$  of a reference line on the disk is given by

$$\theta = -1.00 - 0.600t + 0.250t^2, \quad (10-9)$$

with  $t$  in seconds,  $\theta$  in radians, and the zero angular position as indicated in the figure.


(a) Graph the angular position of the disk versus time from  $t = -3.0$  s to  $t = 5.4$  s. Sketch the disk and its angular position reference line at  $t = -2.0$  s, 0 s, and 4.0 s, and when the curve crosses the  $t$  axis.

**Calculations:** To sketch the disk and its reference line at a particular time, we need to determine  $\theta$  for that time. To do so, we substitute the time into Eq. 10-9. For  $t = -2.0$  s, we get

$$\begin{aligned} \theta &= -1.00 - (0.600)(-2.0) + (0.250)(-2.0)^2 \\ &= 1.2 \text{ rad} = 1.2 \text{ rad} \frac{360^\circ}{2\pi \text{ rad}} = 69^\circ. \end{aligned}$$

This means that at  $t = -2.0$  s the reference line on the disk is rotated counterclockwise from the zero position by  $1.2 \text{ rad} = 69^\circ$  (counterclockwise because  $\theta$  is positive). Sketch 1 in Fig. 10-5b shows this position of the reference line.

Similarly, for  $t = 0$ , we find  $\theta = -1.00 \text{ rad} = -57^\circ$ , which means that the reference line is rotated clockwise from the zero angular position by  $1.0 \text{ rad}$ , or  $57^\circ$ , as shown in sketch 3. For  $t = 4.0$  s, we find  $\theta = 0.60 \text{ rad} = 34^\circ$  (sketch 5). Drawing sketches for when the curve crosses the  $t$  axis is easy, because then  $\theta = 0$  and the reference line is momentarily aligned with the zero angular position (sketches 2 and 4).

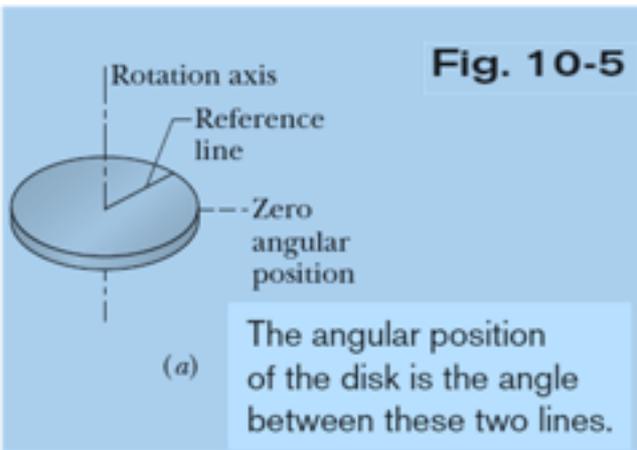

(b) At what time  $t_{\min}$  does  $\theta(t)$  reach the minimum value shown in Fig. 10-5b? What is that minimum value?

**Calculations:** The first derivative of  $\theta(t)$  is

$$\frac{d\theta}{dt} = -0.600 + 0.500t. \quad (10-10)$$


Setting this to zero and solving for  $t$  give us the time at which  $\theta(t)$  is minimum:



$$t_{\min} = 1.20 \text{ s.} \quad (\text{Answer})$$

To get the minimum value of  $\theta$ , we next substitute  $t_{\min}$  into Eq. 10-9, finding

$$\theta = -1.36 \text{ rad} \approx -77.9^\circ. \quad (\text{Answer})$$

This is a plot of the angle of the disk versus time.

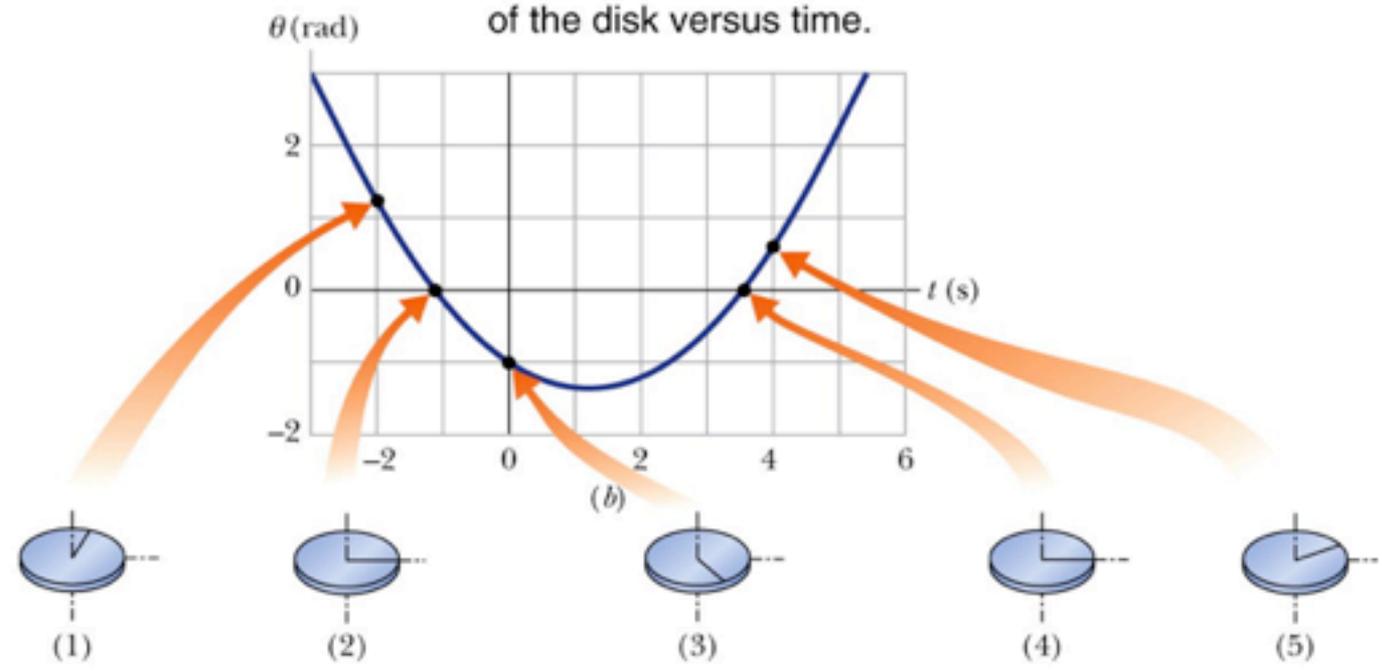

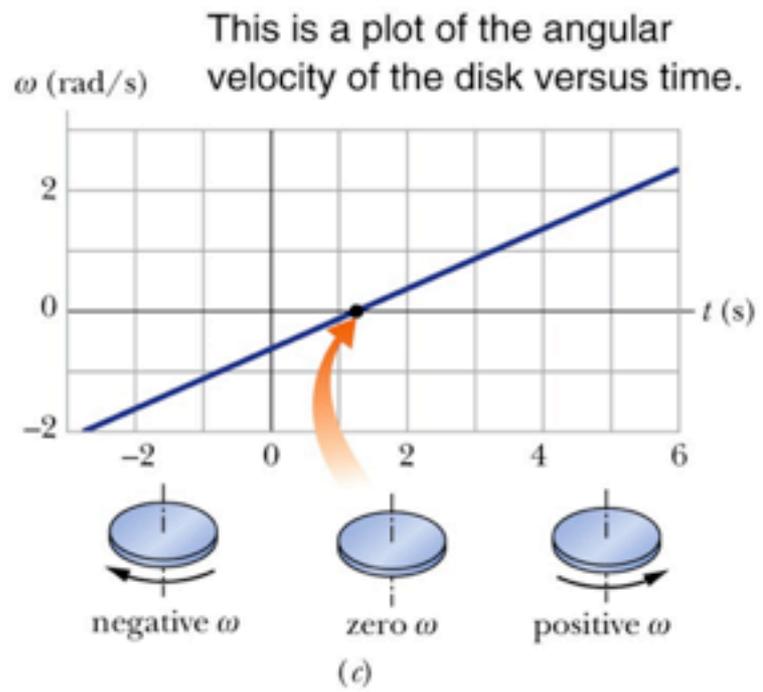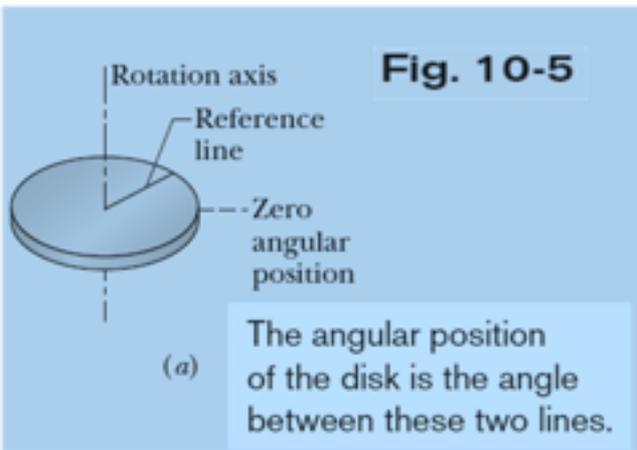

(c) Graph the angular velocity  $\omega$  of the disk versus time from  $t = -3.0$  s to  $t = 6.0$  s. Sketch the disk and indicate the direction of turning and the sign of  $\omega$  at  $t = -2.0$  s,  $4.0$  s, and  $t_{\min}$ .

**Calculations:** To sketch the disk at  $t = -2.0$  s, we substitute that value into Eq. 10-11, obtaining

$$\omega = -1.6 \text{ rad/s.} \quad (\text{Answer})$$

The minus sign here tells us that at  $t = -2.0$  s, the disk is turning clockwise (the left-hand sketch in Fig. 10-5c).

Substituting  $t = 4.0$  s into Eq. 10-11 gives us

$$\omega = 1.4 \text{ rad/s.} \quad (\text{Answer})$$

The implied plus sign tells us that now the disk is turning counterclockwise (the righthand sketch in Fig. 10-5c).

For  $t_{\min}$ , we already know that  $d\theta/dt = 0$ . So, we must also have  $\omega = 0$ . That is, the disk momentarily stops when the reference line reaches the minimum value of  $\theta$  in Fig. 10-5b, as suggested by the center sketch in Fig. 10-5c. On the graph, this momentary stop is the zero point where the plot changes from the negative clockwise motion to the positive counterclockwise motion.

(d) Use the results in parts (a) through (c) to describe the motion of the disk from  $t = -3.0$  s to  $t = 6.0$  s.

**Description:** When we first observe the disk at  $t = -3.0$  s, it has a positive angular position and is turning clockwise but slowing. It stops at angular position  $\theta = -1.36$  rad and then begins to turn counterclockwise, with its angular position eventually becoming positive again.

## Sample Problem, Angular Velocity and Acceleration

A child's top is spun with angular acceleration

$$\alpha = 5t^3 - 4t,$$

with  $t$  in seconds and  $\alpha$  in radians per second-squared. At  $t = 0$ , the top has angular velocity 5 rad/s, and a reference line on it is at angular position  $\theta = 2$  rad.

- (a) Obtain an expression for the angular velocity  $\omega(t)$  of the top. That is, find an expression that explicitly indicates how the angular velocity depends on time. (We can tell that there *is* such a dependence because the top is undergoing an angular acceleration, which means that its angular velocity *is* changing.)
- (b) Obtain an expression for the angular position  $\theta(t)$  of the top.

A child's top is spun with angular acceleration

$$\alpha = 5t^3 - 4t,$$

with  $t$  in seconds and  $\alpha$  in radians per second-squared. At  $t = 0$ , the top has angular velocity 5 rad/s, and a reference line on it is at angular position  $\theta = 2$  rad.

(a) Obtain an expression for the angular velocity  $\omega(t)$  of the top. That is, find an expression that explicitly indicates how the angular velocity depends on time. (We can tell that there *is* such a dependence because the top is undergoing an angular acceleration, which means that its angular velocity *is* changing.)

**Calculations:** Equation 10-8 tells us

$$d\omega = \alpha dt,$$

so 
$$\int d\omega = \int \alpha dt.$$

From this we find

$$\omega = \int (5t^3 - 4t) dt = \frac{5}{4}t^4 - \frac{4}{2}t^2 + C.$$

To evaluate the constant of integration  $C$ , we note that  $\omega = 5$  rad/s at  $t = 0$ . Substituting these values in our expression for  $\omega$  yields

$$5 \text{ rad/s} = 0 - 0 + C,$$

so  $C = 5$  rad/s. Then

$$\omega = \frac{5}{4}t^4 - 2t^2 + 5. \quad (\text{Answer})$$

(b) Obtain an expression for the angular position  $\theta(t)$  of the top.

$$\omega = \frac{5}{4}t^4 - 2t^2 + 5.$$

**Calculations:** Since Eq. 10-6 tells us that


$$d\theta = \omega dt,$$

we can write

$$\begin{aligned}\theta &= \int \omega dt = \int \left(\frac{5}{4}t^4 - 2t^2 + 5\right) dt \\ &= \frac{1}{4}t^5 - \frac{2}{3}t^3 + 5t + C' \\ &= \frac{1}{4}t^5 - \frac{2}{3}t^3 + 5t + 2, \quad (\text{Answer})\end{aligned}$$

where  $C'$  has been evaluated by noting that  $\theta = 2$  rad at  $t = 0$ .


## 10.3: Angular Quantities as Vectors.

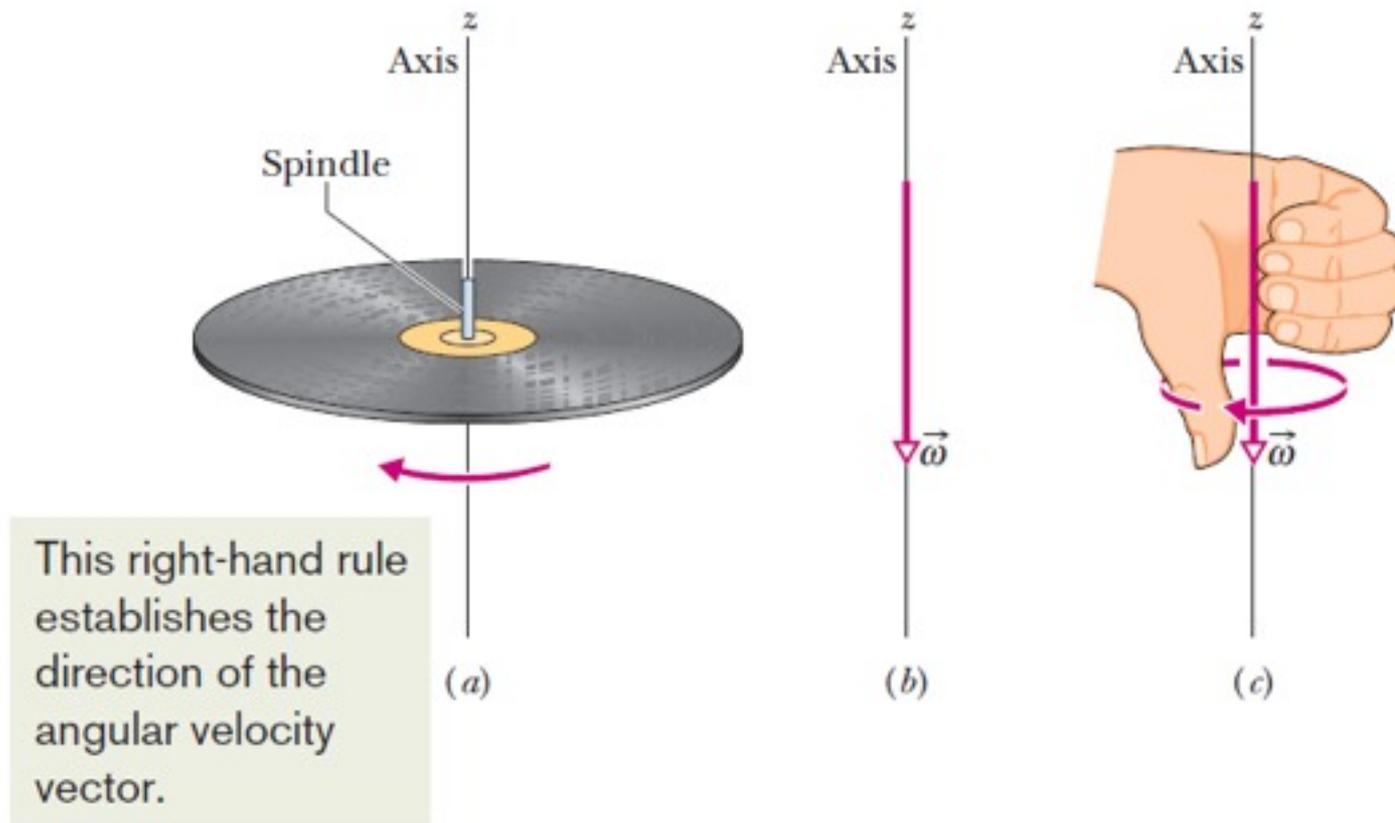

- angular velocity can be considered a vector
- its direction is along the axis of rotation as given by right hand rule
- angular acceleration can be considered a vector too

## 10.3: Angular Quantities as Vectors.

- angular displacement can NOT be considered a vector
  - the sequence of two consecutive rotations give different results, that is, they depend on the order in which they are made (when they are about different axes)
  - but if rotations were vectors we would be able to add them, and addition is commutative

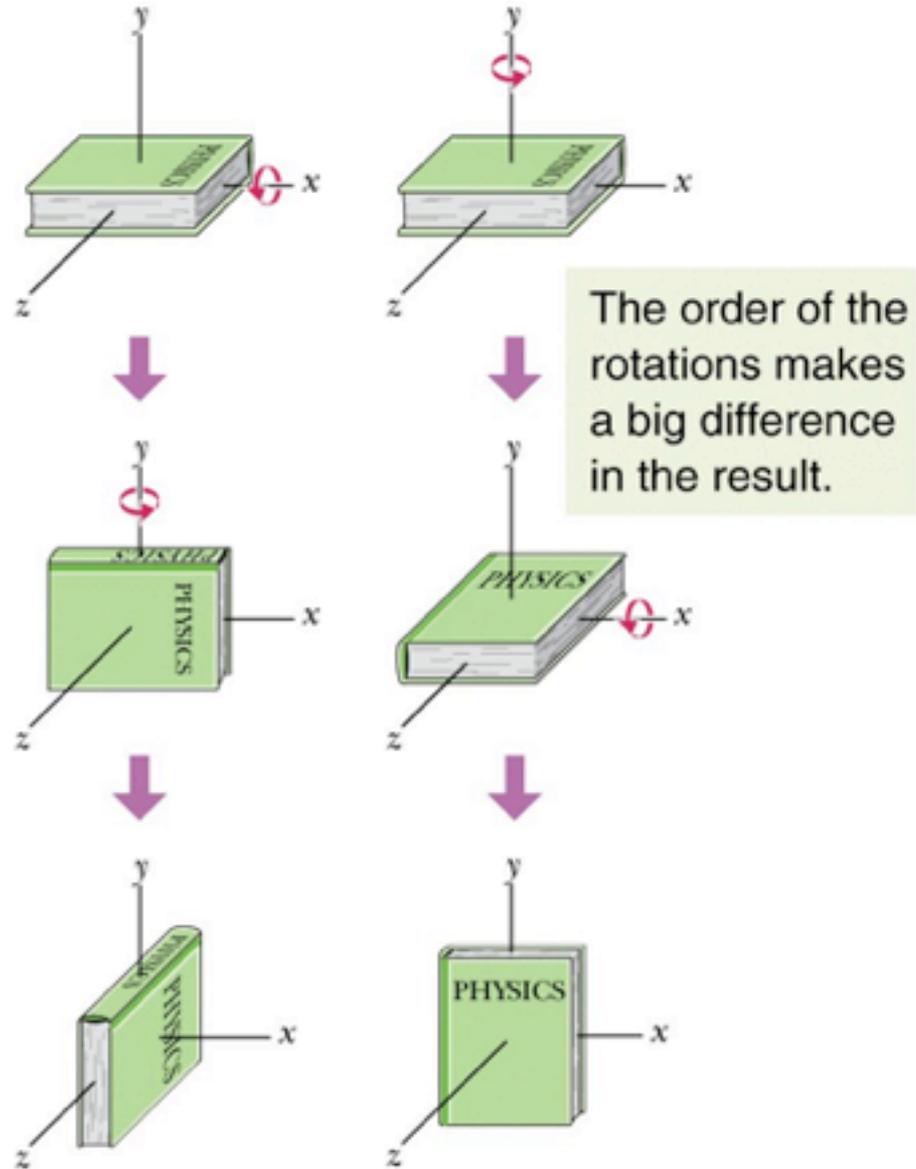

## 10.4: Rotation with Constant Angular Acceleration

TABLE 10-1

Equations of Motion for Constant Linear Acceleration and for Constant Angular Acceleration

Equation Number	Linear Equation	Missing Variable		Angular Equation
(2-11)	$v = v_0 + at$	$x - x_0$	$\theta - \theta_0$	$\omega = \omega_0 + \alpha t$
(2-15)	$x - x_0 = v_0 t + \frac{1}{2}at^2$	$v$	$\omega$	$\theta - \theta_0 = \omega_0 t + \frac{1}{2}\alpha t^2$
(2-16)	$v^2 = v_0^2 + 2a(x - x_0)$	$t$	$t$	$\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0)$
(2-17)	$x - x_0 = \frac{1}{2}(v_0 + v)t$	$a$	$\alpha$	$\theta - \theta_0 = \frac{1}{2}(\omega_0 + \omega)t$
(2-18)	$x - x_0 = vt - \frac{1}{2}at^2$	$v_0$	$\omega_0$	$\theta - \theta_0 = \omega t - \frac{1}{2}\alpha t^2$

The equations for constant linear acceleration and for constant angular acceleration are solutions to the same basic equation, hence the precise parallel:

$$\frac{d^2 x}{dt^2} = a = \text{constant}$$

$$\frac{d^2 \theta}{dt^2} = \alpha = \text{constant}$$


## Sample problem: Constant Angular Acceleration

**Fig. 10-8**

We measure rotation by using this reference line.

Clockwise = negative

Counterclockwise = positive

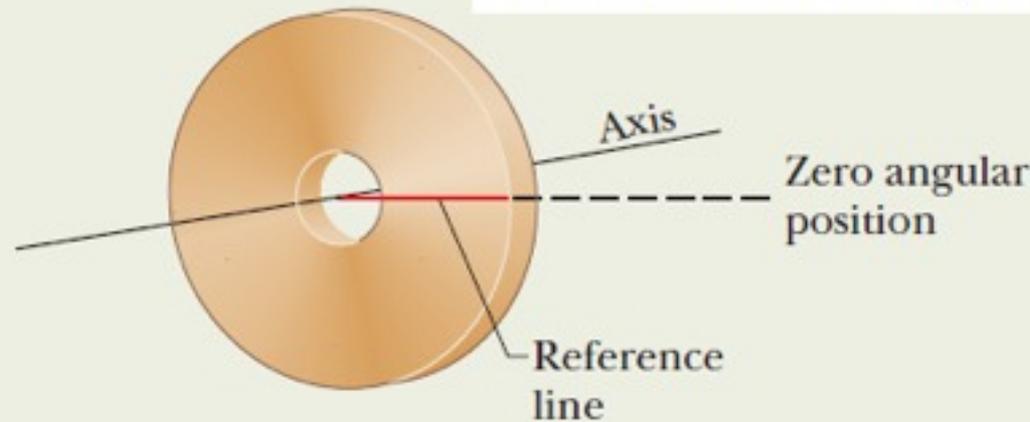

A grindstone (Fig. 10-8) rotates at constant angular acceleration  $\alpha = 0.35 \text{ rad/s}^2$ . At time  $t = 0$ , it has an angular velocity of  $\omega_0 = -4.6 \text{ rad/s}$  and a reference line on it is horizontal, at the angular position  $\theta_0 = 0$ .


(a) At what time after  $t = 0$  is the reference line at the angular position  $\theta = 5.0 \text{ rev}$ ?

(b) Describe the grindstone's rotation between  $t = 0$  and  $t = 32 \text{ s}$ .

(c) At what time  $t$  does the grindstone momentarily stop?

**Fig. 10-8**

We measure rotation by using this reference line.  
Clockwise = negative  
Counterclockwise = positive

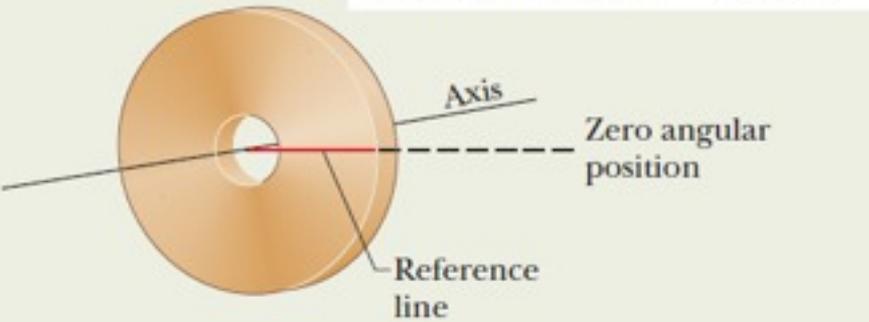

A grindstone (Fig. 10-8) rotates at constant angular acceleration  $\alpha = 0.35 \text{ rad/s}^2$ . At time  $t = 0$ , it has an angular velocity of  $\omega_0 = -4.6 \text{ rad/s}$  and a reference line on it is horizontal, at the angular position  $\theta_0 = 0$ .

(a) At what time after  $t = 0$  is the reference line at the angular position  $\theta = 5.0 \text{ rev}$ ?

The angular acceleration is constant, so we can use the rotation equation:

$$\theta - \theta_0 = \omega_0 t + \frac{1}{2} \alpha t^2,$$

Substituting known values and setting  $\theta_0 = 0$  and  $\theta = 5.0 \text{ rev} = 10\pi \text{ rad} = (-4.6 \text{ rad/s})t + \frac{1}{2}(0.35 \text{ rad/s}^2)t^2$ .

Solving this quadratic equation for  $t$ , we find  $t = 32 \text{ s}$ .

(b) Describe the grindstone's rotation between  $t = 0$  and  $t = 32 \text{ s}$ .

**Description:** The wheel is initially rotating in the negative (clockwise) direction with angular velocity  $\omega_0 = 4.6 \text{ rad/s}$ , but its angular acceleration  $\alpha$  is positive.

The initial opposite signs of angular velocity and angular acceleration means that the wheel slows in its rotation in the negative direction, stops, and then reverses to rotate in the positive direction.

After the reference line comes back through its initial orientation of  $\theta = 0$ , the wheel turns an additional 5.0 rev by time  $t = 32 \text{ s}$ .

(c) At what time  $t$  does the grindstone momentarily stop?

**Calculation:** With  $\omega = 0$ , we solve for the corresponding time  $t$ .

$$t = \frac{\omega - \omega_0}{\alpha} = \frac{0 - (-4.6 \text{ rad/s})}{0.35 \text{ rad/s}^2} = 13 \text{ s}.$$

# Sample problem: Constant Angular Acceleration

## Constant angular acceleration, riding a Rotor

While you are operating a Rotor (a large, vertical, rotating cylinder found in amusement parks), you spot a passenger in acute distress and decrease the angular velocity of the cylinder from 3.40 rad/s to 2.00 rad/s in 20.0 rev, at constant angular acceleration. (The passenger is obviously more of a “translation person” than a “rotation person.”)

(a) What is the constant angular acceleration during this decrease in angular speed?

### KEY IDEA

Because the cylinder’s angular acceleration is constant, we can relate it to the angular velocity and angular displacement via the basic equations for constant angular acceleration (Eqs. 10-12 and 10-13).

**Calculations:** The initial angular velocity is  $\omega_0 = 3.40$  rad/s, the angular displacement is  $\theta - \theta_0 = 20.0$  rev, and the angular velocity at the end of that displacement is  $\omega = 2.00$  rad/s. But we do not know the angular acceleration  $\alpha$  and time  $t$ , which are in both basic equations.

To eliminate the unknown  $t$ , we use Eq. 10-12 to write

$$t = \frac{\omega - \omega_0}{\alpha},$$

which we then substitute into Eq. 10-13 to write

$$\theta - \theta_0 = \omega_0 \left( \frac{\omega - \omega_0}{\alpha} \right) + \frac{1}{2} \alpha \left( \frac{\omega - \omega_0}{\alpha} \right)^2.$$

Solving for  $\alpha$ , substituting known data, and converting 20 rev to 125.7 rad, we find

$$\begin{aligned} \alpha &= \frac{\omega^2 - \omega_0^2}{2(\theta - \theta_0)} = \frac{(2.00 \text{ rad/s})^2 - (3.40 \text{ rad/s})^2}{2(125.7 \text{ rad})} \\ &= -0.0301 \text{ rad/s}^2. \end{aligned} \quad (\text{Answer})$$

(b) How much time did the speed decrease take?

**Calculation:** Now that we know  $\alpha$ , we can use Eq. 10-12 to solve for  $t$ :

$$\begin{aligned} t &= \frac{\omega - \omega_0}{\alpha} = \frac{2.00 \text{ rad/s} - 3.40 \text{ rad/s}}{-0.0301 \text{ rad/s}^2} \\ &= 46.5 \text{ s}. \end{aligned} \quad (\text{Answer})$$

## 10.5: Relating the Linear and Angular Variables

This is no different than in circular motion. But we consider now non-uniform motion, that is, angular speed may change. Then there may be an *angular acceleration* (or *tangential acceleration*; see below)

Recall: If a reference line on a rigid body rotates through an angle  $\theta$ , a point within the body at a position  $r$  from the rotation axis moves a distance  $s$  along a circular arc, where  $s$  is given by:

$$s = \theta r \quad (\text{radian measure}).$$

Differentiating the above equation with respect to time—with  $r$  held constant—leads to

$$v = \omega r \quad (\text{radian measure})$$


The period of revolution  $T$  for the motion of each point and for the rigid body itself is given by

$$T = \frac{2\pi r}{v}$$


Substituting for  $v$  we find also that

$$T = \frac{2\pi}{\omega} \quad (\text{radian measure})$$

The velocity vector is always tangent to this circle around the rotation axis.

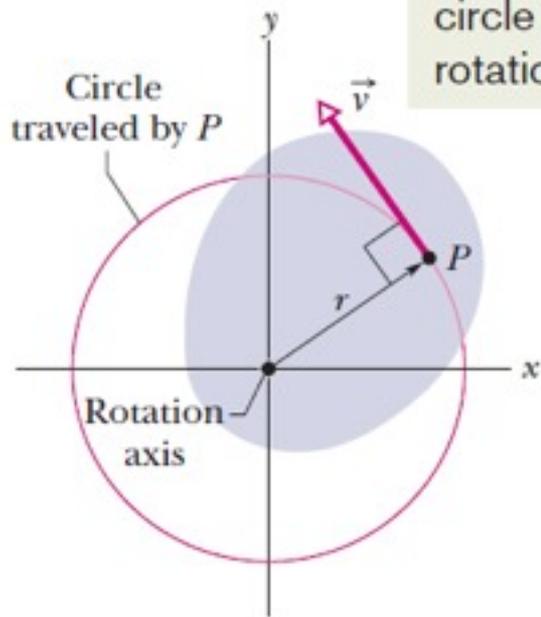

The acceleration always has a radial (centripetal) component and may have a tangential component.

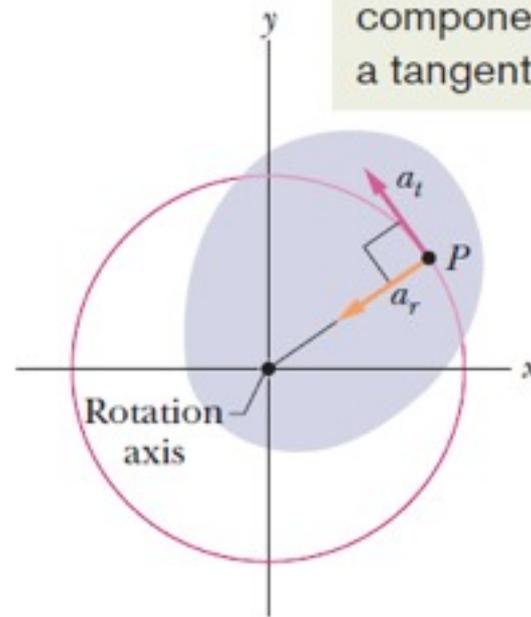

Differentiating the velocity relation with respect to time — again with  $r$  held constant — leads to

$$a_t = \alpha r \quad (\text{radian measure})$$

Here,  $\alpha = d\omega/dt$ .

Note that  $dv/dt = a_t$  represents only the part of the linear acceleration that is responsible for changes in the magnitude  $v$  of the linear velocity. Like  $v$ , that part of the linear acceleration is tangent to the path of the point in question.

The radial component of the acceleration is the centripetal acceleration:

$$a_r = \frac{v^2}{r} = \omega^2 r$$


## Sample problem

Consider an induction roller coaster (which can be accelerated by magnetic forces even on a horizontal track). Each passenger is to leave the loading point with acceleration  $g$  along the horizontal track.

That first section of track forms a circular arc (Fig. 10-10), so that the passenger also experiences a centripetal acceleration. As the passenger accelerates along the arc, the magnitude of this centripetal acceleration increases alarmingly. When the magnitude  $a$  of the net acceleration reaches  $4g$  at some point  $P$  and angle  $\theta_P$  along the arc, the passenger moves in a straight line, along a tangent to the arc.

(a) What angle  $\theta_P$  should the arc subtend so that  $a$  is  $4g$  at point  $P$ ?

(b) What is the magnitude  $a$  of the passenger's net acceleration at point  $P$  and after point  $P$ ?

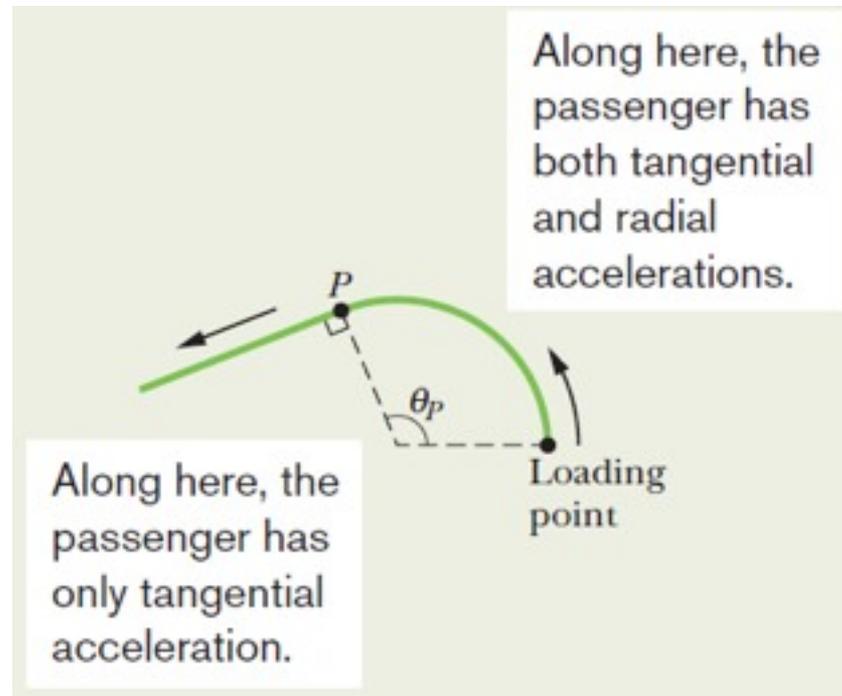

(a) What angle  $\theta_P$  should the arc subtend so that  $a$  is  $4g$  at point  $P$ ?

The net acceleration is the vector sum of the tangential and radial acceleration. We know  $a_t = g$ . The angular acceleration is therefore constant,  $\alpha = a_t/r$ . The radial (centripetal) acceleration will increase as the roller coaster speeds up. It speeds up because there is a tangential acceleration, so we must be able to give the radial acceleration in terms of the tangential one and the angle by which it has been displaced.

Calculations: first find a relation giving angular velocity in terms of angular displacement and acceleration.

$$\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0).$$

Substituting  $\omega_0 = 0$ ,  $\theta_0 = 0$  and  $\alpha = a_t/r$  we find:


$$\omega^2 = \frac{2a_t\theta}{r}.$$

Now we can use this to get the centripetal acceleration

$$a_r = \omega^2 r$$

thus

$$a_r = 2a_t\theta.$$

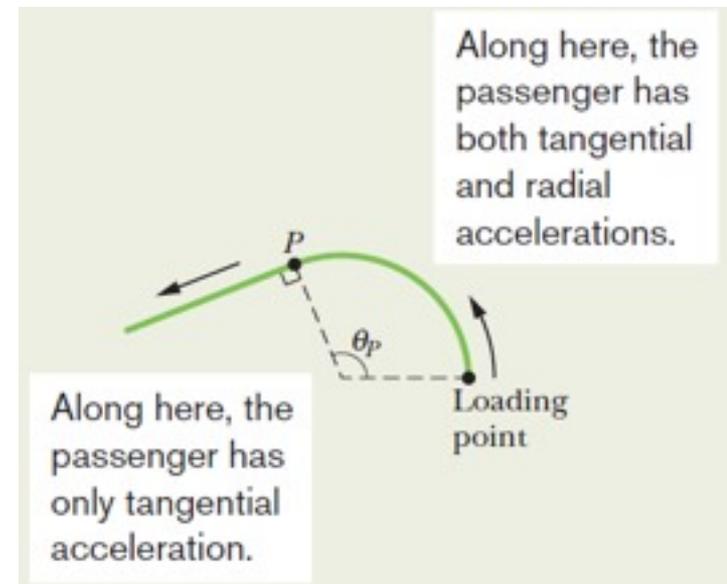

This leads us to a total acceleration:

$$a = \sqrt{a_t^2 + a_r^2}.$$

Substituting for  $a_r$ , and solving for  $\theta$  leads to

$$\theta = \frac{1}{2} \sqrt{\frac{a^2}{a_t^2} - 1}.$$

When  $a$  reaches the design value of  $4g$ , angle  $\theta$  is the angle  $\theta_P$ . Substituting  $a = 4g$ ,  $\theta = \theta_P$ , and  $a_t = g$ , we find:

$$\theta_P = \frac{1}{2} \sqrt{\frac{(4g)^2}{g^2} - 1} = 1.94 \text{ rad} = 111^\circ.$$

(b) What is the magnitude  $a$  of the passenger's net acceleration at point  $P$  and after point  $P$ ?


**Reasoning:** At  $P$ ,  $a$  has the design value of  $4g$ . Just after  $P$  is reached, the passenger moves in a straight line and no longer has centripetal acceleration.

Thus, the passenger has only the acceleration magnitude  $g$  along the track.

Hence,  $a = 4g$  at  $P$  and  $a = g$  after  $P$ . (Answer)

*Roller-coaster headache can occur when a passenger's head undergoes an abrupt change in acceleration, with the acceleration magnitude large before or after the change.*

*The reason is that the change can cause the brain to move relative to the skull, tearing the veins that bridge the brain and skull. Our design to increase the acceleration from  $g$  to  $4g$  along the path to  $P$  might harm the passenger, but the abrupt change in acceleration as the passenger passes through point  $P$  is more likely to cause roller-coaster headache.*

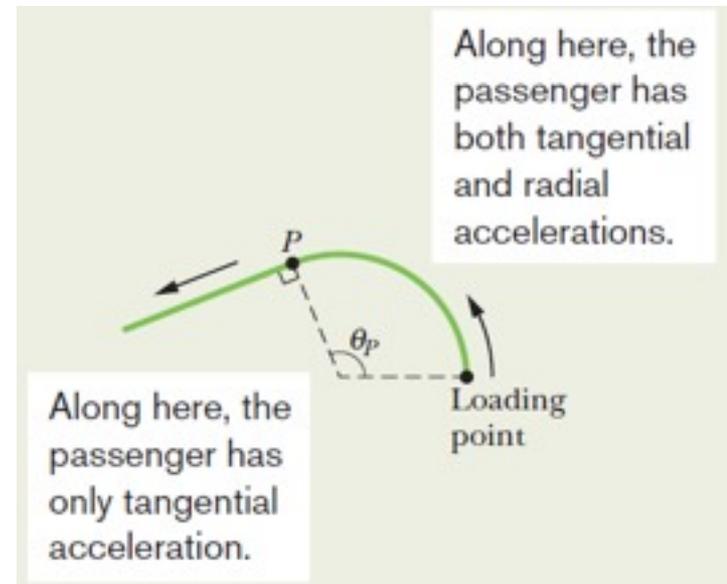

## 10.6: Kinetic Energy of Rotation

For an extended rotating rigid body, treat the body as a collection of particles with different speeds, and add up the kinetic energies of all the particles to find the total kinetic energy of the body:

$$\begin{aligned} K &= \frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 + \frac{1}{2}m_3v_3^2 + \dots \\ &= \sum \frac{1}{2}m_iv_i^2, \end{aligned}$$

( $m_i$  is the mass of the  $i^{\text{th}}$  particle and  $v_i$  is its speed). Then

$$K = \sum \frac{1}{2}m_i(\omega r_i)^2 = \frac{1}{2} \left( \sum m_i r_i^2 \right) \omega^2, \quad (\omega \text{ is the same for all particles}).$$

The quantity in parentheses on the right side is called the rotational inertia (or moment of inertia)  $I$  of the body with respect to the axis of rotation. It is a constant for a particular rigid body and a particular rotation axis. (That axis must always be specified.)

Therefore, 
$$I = \sum m_i r_i^2 \quad (\text{rotational inertia})$$



$$K = \frac{1}{2}I\omega^2 \quad (\text{radian measure})$$

## 10.7: Calculating the Rotational Inertia

$$I = \sum m_i r_i^2 \quad (\text{rotational inertia})$$


If a rigid body consists of a great many adjacent particles (it is continuous) the discrete sum over infinitely many infinitesimal masses is really an integral:

$$I = \int r^2 dm \quad (\text{rotational inertia, continuous body}).$$

## Sample problem: Rotational Inertia

Figure 10-13a shows a rigid body consisting of two particles of mass  $m$  connected by a rod of length  $L$  and negligible mass.

(a) What is the rotational inertia  $I_{\text{com}}$  about an axis through the center of mass, perpendicular to the rod as shown?

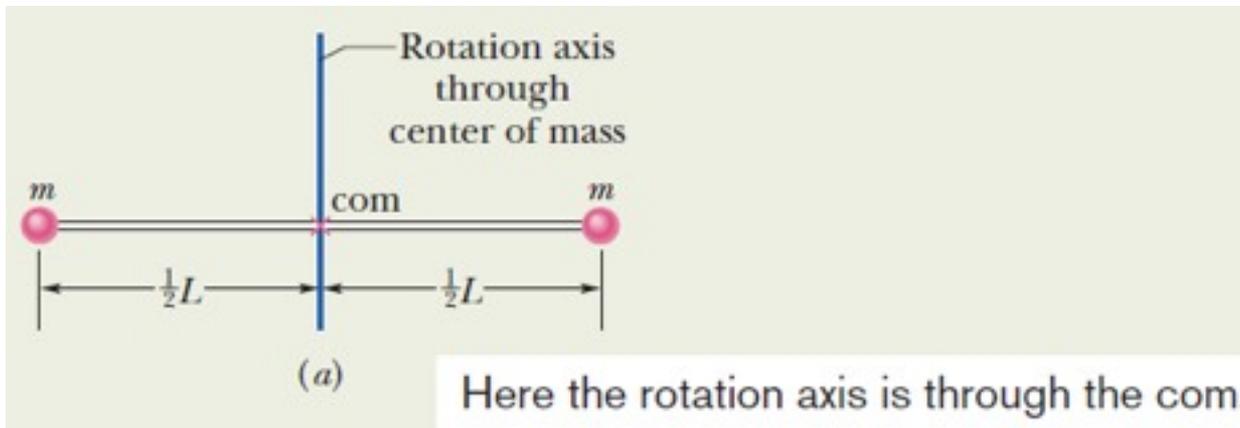

**Calculations:** For the two particles, each at perpendicular distance  $\frac{1}{2}L$  from the rotation axis, we have


$$\begin{aligned} I &= \sum m_i r_i^2 = (m)\left(\frac{1}{2}L\right)^2 + (m)\left(\frac{1}{2}L\right)^2 \\ &= \frac{1}{2}mL^2. \end{aligned} \quad \text{(Answer)}$$

## 10.7: Calculating the Rotational Inertia

### Parallel Axis Theorem:

If  $h$  is a perpendicular distance between a given axis and the axis through the center of mass (these two axes being parallel). Then the rotational inertia  $I$  about the given axis is

$$I = I_{\text{com}} + Mh^2 \quad (\text{parallel-axis theorem})$$

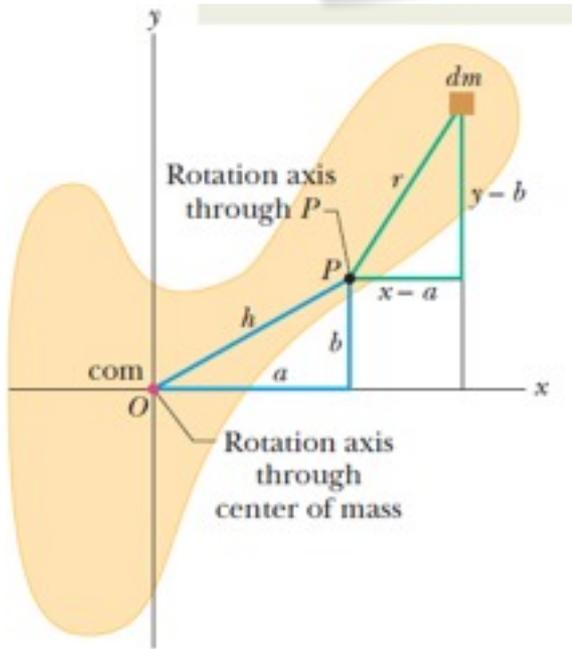

$$\begin{aligned} I &= \int r^2 dm = \int [(x-a)^2 + (y-b)^2] dm \\ &= \int (x^2 + y^2) dm - 2a \int x dm - 2b \int y dm + \int (a^2 + b^2) dm \end{aligned}$$

$\swarrow$   $\searrow$


$0$   $0$

## Sample problem: Rotational Inertia

Figure 10-13a shows a rigid body consisting of two particles of mass  $m$  connected by a rod of length  $L$  and negligible mass.


(a) What is the rotational inertia  $I_{\text{com}}$  about an axis through the center of mass, perpendicular to the rod as shown?

(b) What is the rotational inertia  $I$  of the body about an axis through the left end of the rod and parallel to the first axis (Fig. 10-13b)?

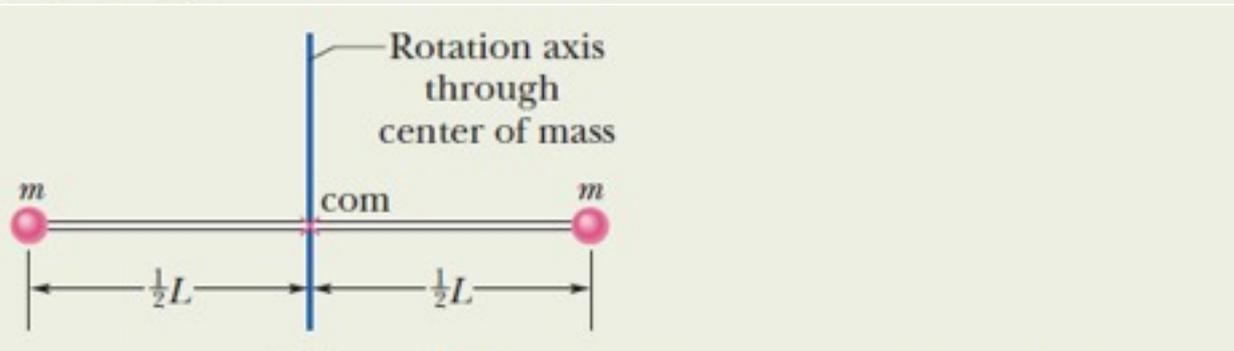

(a)

Here the rotation axis is through the com.

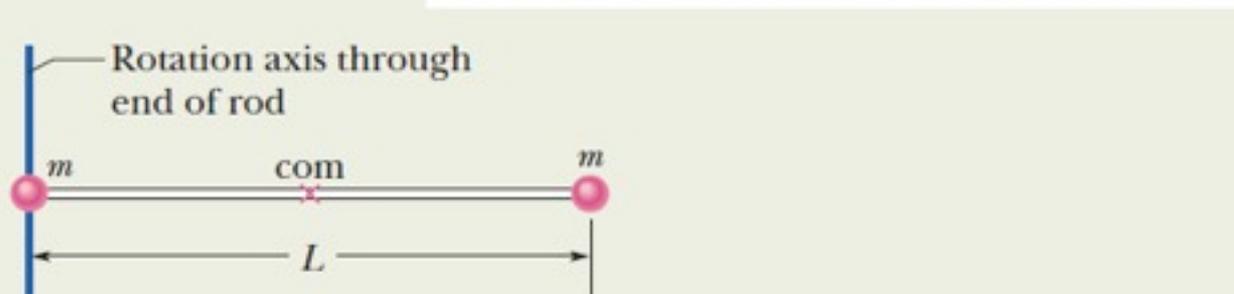


(b)

Here it has been shifted from the com


## Sample problem: Rotational Inertia

Figure 10-13a shows a rigid body consisting of two particles of mass  $m$  connected by a rod of length  $L$  and negligible mass.

(a) What is the rotational inertia  $I_{\text{com}}$  about an axis through the center of mass, perpendicular to the rod as shown?

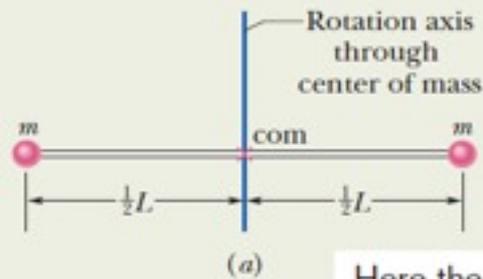

Here the rotation axis is through the com.

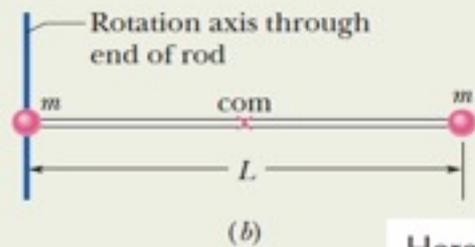

Here it has been shifted from the com without changing the orientation. We can use the parallel-axis theorem.

**Calculations:** For the two particles, each at perpendicular distance  $\frac{1}{2}L$  from the rotation axis, we have

$$\begin{aligned} I &= \sum m_i r_i^2 = (m)\left(\frac{1}{2}L\right)^2 + (m)\left(\frac{1}{2}L\right)^2 \\ &= \frac{1}{2}mL^2. \end{aligned} \quad (\text{Answer})$$

(b) What is the rotational inertia  $I$  of the body about an axis through the left end of the rod and parallel to the first axis (Fig. 10-13b)?

**First technique:** We calculate  $I$  as in part (a), except here the perpendicular distance  $r_i$  is zero for the particle on the left and

$L$  for the particle on the right. Now Eq. 10-33 gives us

$$I = m(0)^2 + mL^2 = mL^2. \quad (\text{Answer})$$


**Second technique:** Because we already know  $I_{\text{com}}$  about an axis through the center of mass and because the axis here is parallel to that “com axis,” we can apply the parallel-axis theorem (Eq. 10-36). We find

$$\begin{aligned} I &= I_{\text{com}} + Mh^2 = \frac{1}{2}mL^2 + (2m)\left(\frac{1}{2}L\right)^2 \\ &= mL^2. \end{aligned} \quad (\text{Answer})$$

## Sample problem: Rotational Inertia

Figure 10-14 shows a thin, uniform rod of mass  $M$  and length  $L$ , on an  $x$  axis with the origin at the rod's center.

(a) What is the rotational inertia of the rod about the perpendicular rotation axis through the center?

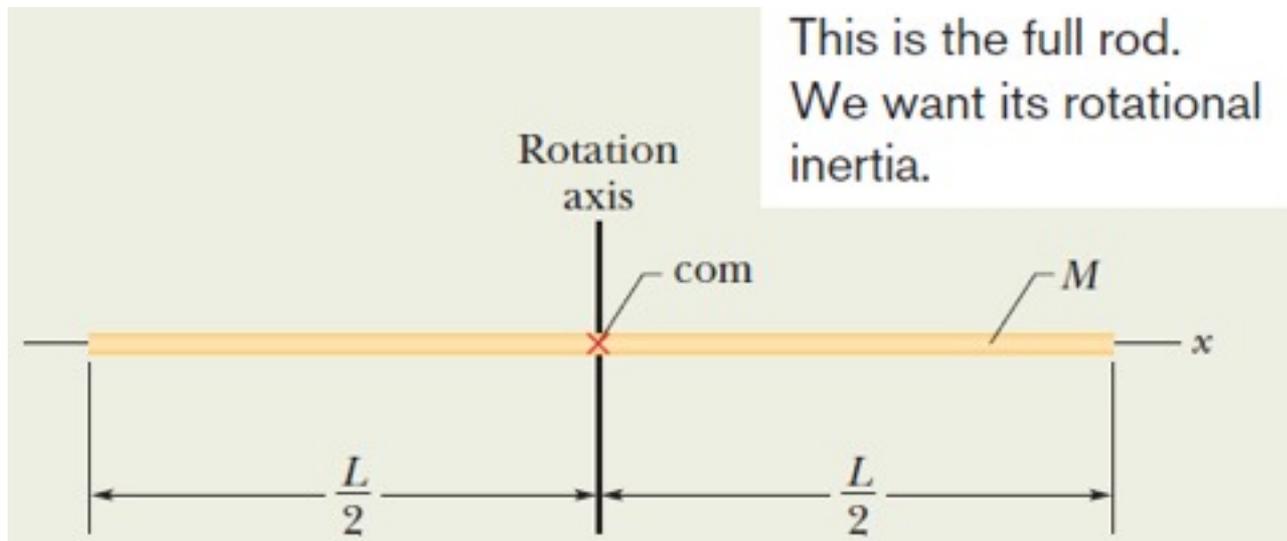

# Sample problem: Rotational Inertia


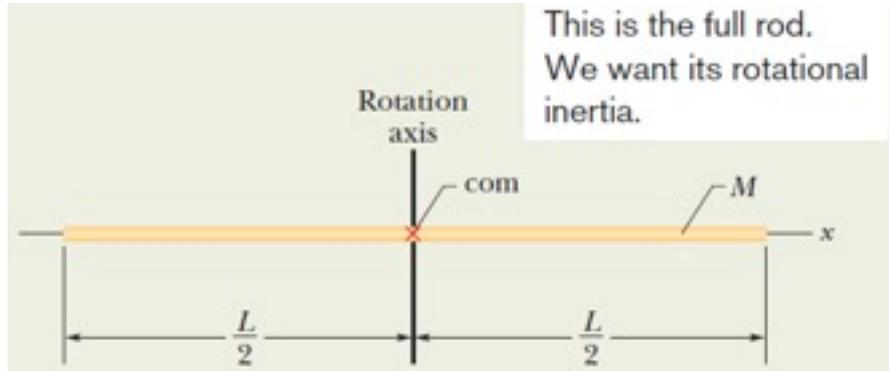


Figure 10-14 shows a thin, uniform rod of mass  $M$  and length  $L$ , on an  $x$  axis with the origin at the rod's center.

(a) What is the rotational inertia of the rod about the perpendicular rotation axis through the center?

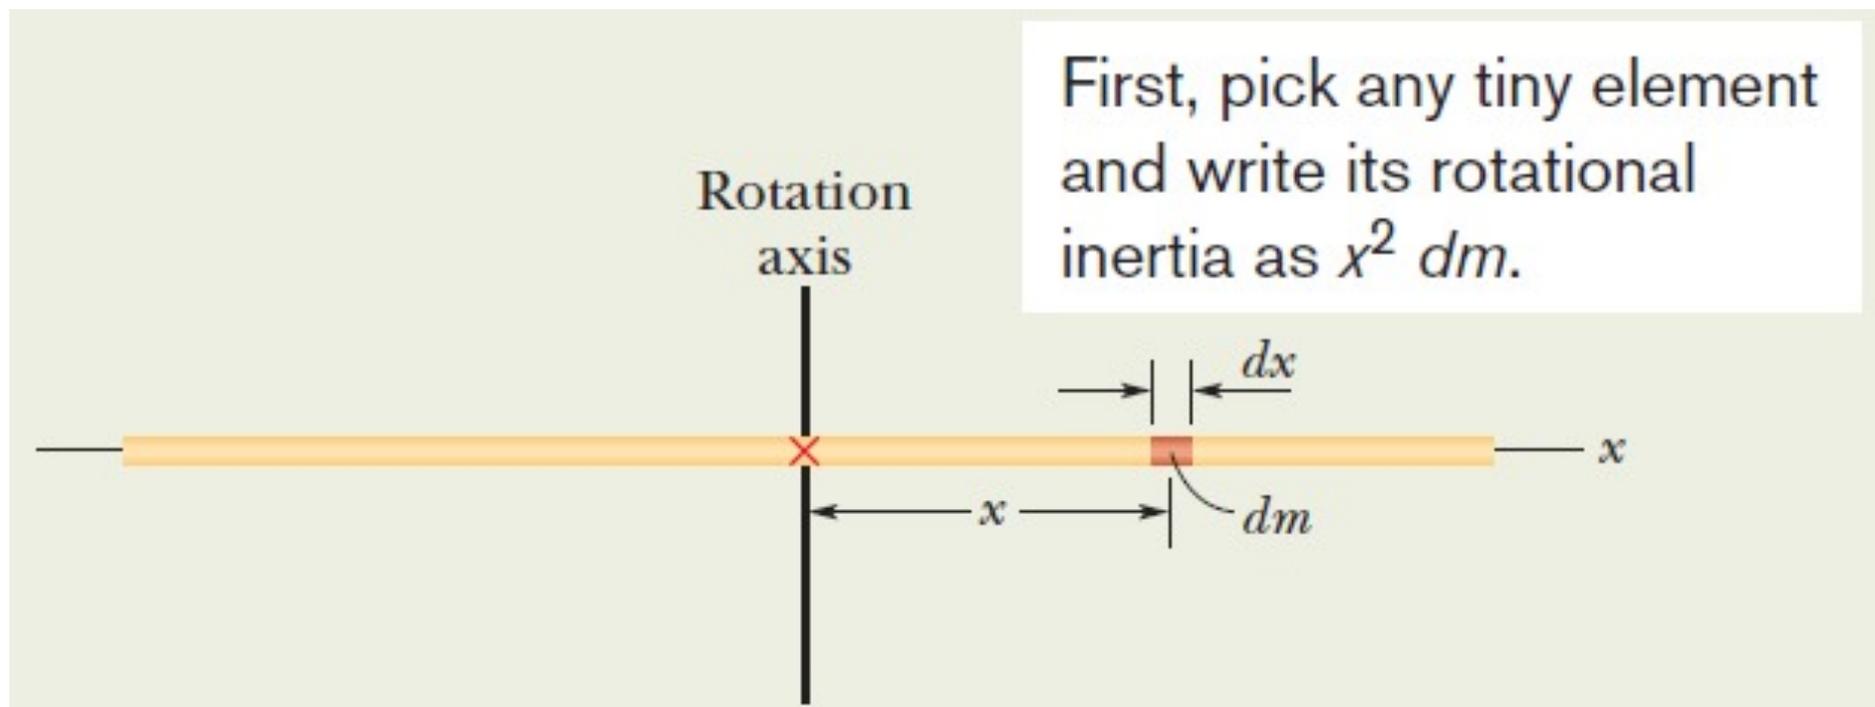

First, pick any tiny element and write its rotational inertia as  $x^2 dm$ .

Rotation  
axis



First, pick any tiny element and write its rotational inertia as  $x^2 dm$ .

### KEY IDEAS

(1) Because the rod is uniform, its center of mass is at its center. Therefore, we are looking for  $I_{\text{com}}$ . (2) Because the rod is a continuous object, we must use the integral of Eq. 10-35,

$$I = \int r^2 dm, \quad (10-38)$$

to find the rotational inertia.

**Calculations:** We want to integrate with respect to coordinate  $x$  (not mass  $m$  as indicated in the integral), so we must relate the mass  $dm$  of an element of the rod to its length  $dx$  along the rod. (Such an element is shown in Fig. 10-14.) Because the rod is uniform, the ratio of mass to length is the same for all the elements and for the rod as a whole. Thus, we can write

$$\frac{\text{element's mass } dm}{\text{element's length } dx} = \frac{\text{rod's mass } M}{\text{rod's length } L}$$


or 
$$dm = \frac{M}{L} dx.$$

We can now substitute this result for  $dm$  and  $x$  for  $r$  in Eq. 10-38. Then we integrate from end to end of the rod (from  $x = -L/2$  to  $x = L/2$ ) to include all the elements. We find

$$\begin{aligned} I &= \int_{x=-L/2}^{x=+L/2} x^2 \left( \frac{M}{L} \right) dx \\ &= \frac{M}{3L} \left[ x^3 \right]_{-L/2}^{+L/2} = \frac{M}{3L} \left[ \left( \frac{L}{2} \right)^3 - \left( -\frac{L}{2} \right)^3 \right] \\ &= \frac{1}{12} ML^2. \end{aligned} \quad (\text{Answer})$$

# Sample problem: Rotational Inertia

Fig. 10-14

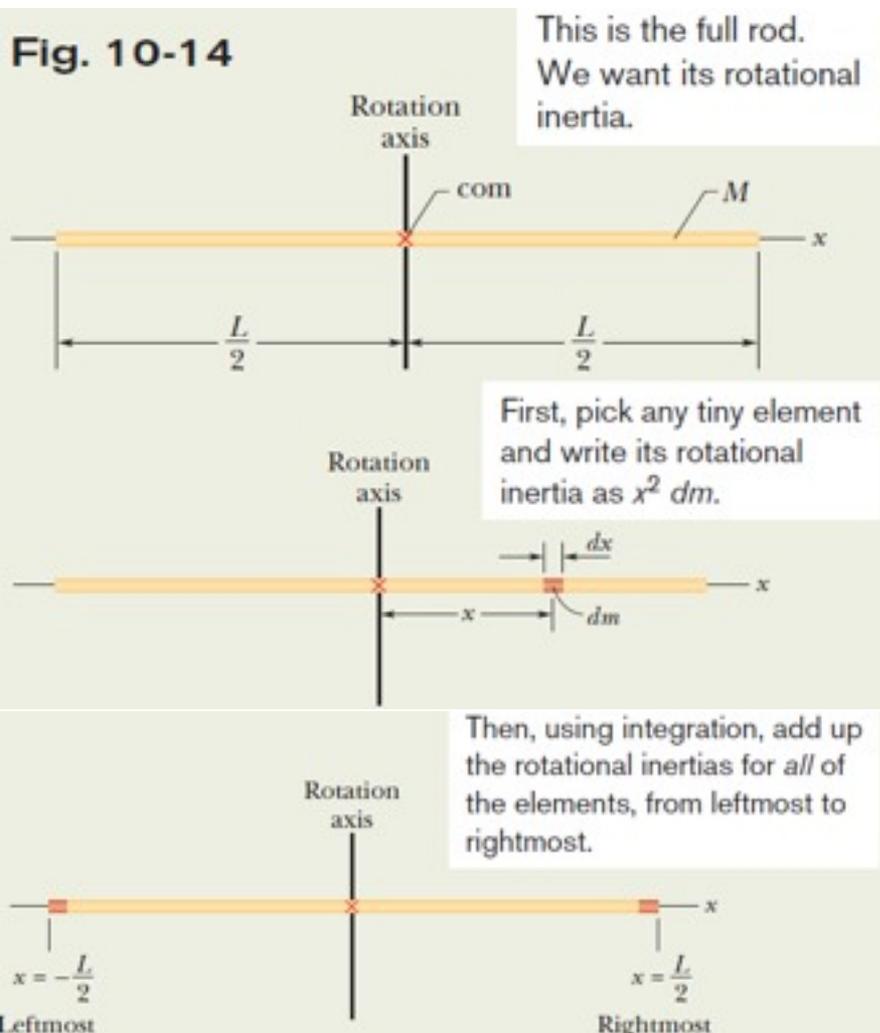

(b) What is the rod's rotational inertia  $I$  about a new rotation axis that is perpendicular to the rod and through the left end?

## KEY IDEAS










We can find  $I$  by shifting the origin of the  $x$  axis to the left end of the rod and then integrating from  $x = 0$  to  $x = L$ . However, here we shall use a more powerful (and easier) technique by applying the parallel-axis theorem (Eq. 10-36), in which we shift the rotation axis without changing its orientation.

**Calculations:** If we place the axis at the rod's end so that it is parallel to the axis through the center of mass, then we can use the parallel-axis theorem (Eq. 10-36). We know from part (a) that  $I_{\text{com}}$  is  $\frac{1}{12}ML^2$ . From Fig. 10-14, the perpendicular distance  $h$  between the new rotation axis and the center of mass is  $\frac{1}{2}L$ . Equation 10-36 then gives us

$$\begin{aligned} I &= I_{\text{com}} + Mh^2 = \frac{1}{12} ML^2 + (M)\left(\frac{1}{2}L\right)^2 \\ &= \frac{1}{3} ML^2. \end{aligned} \quad (\text{Answer})$$

Actually, this result holds for any axis through the left or right end that is perpendicular to the rod, whether it is parallel to the axis shown in Fig. 10-14 or not.

## Some Rotational Inertias

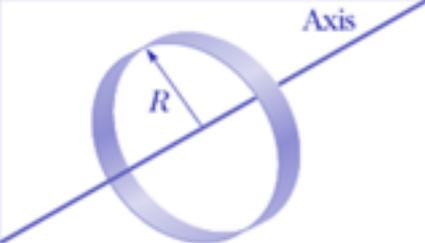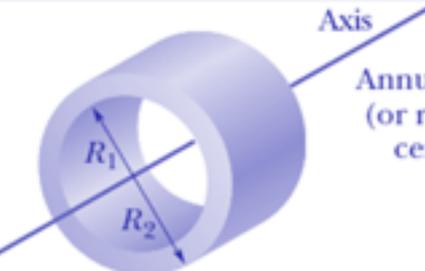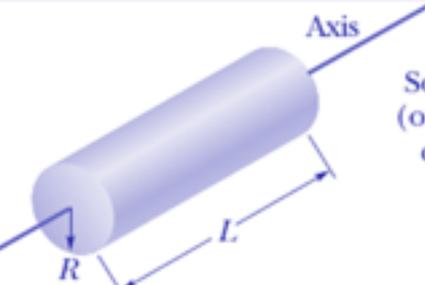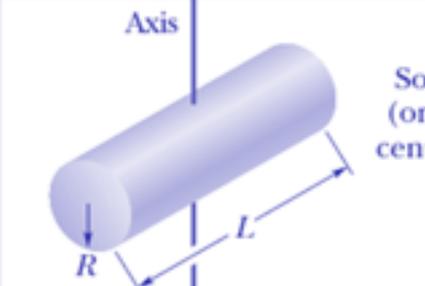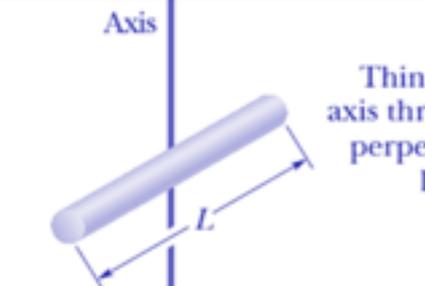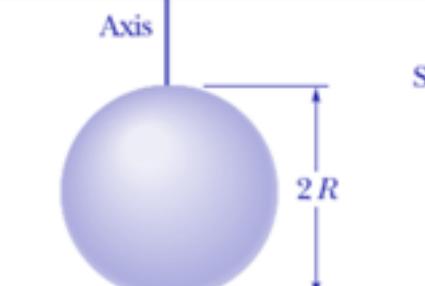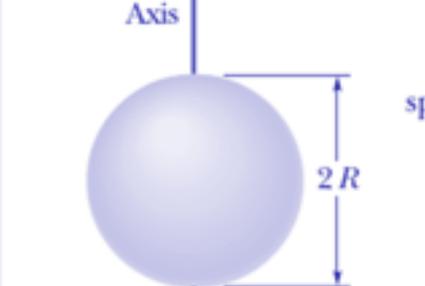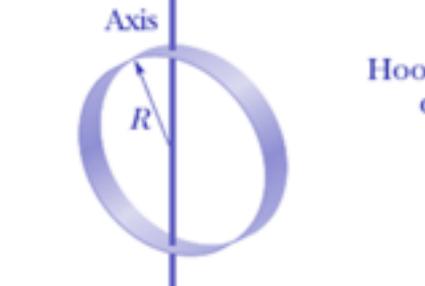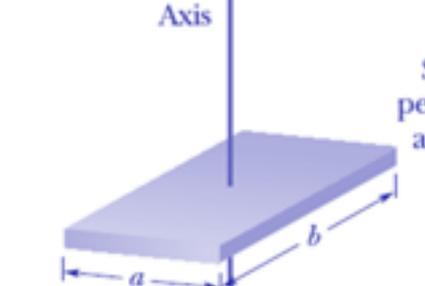 <p>Hoop about central axis</p> <p><math>I = MR^2</math> (a)</p>	 <p>Annular cylinder (or ring) about central axis</p> <p><math>I = \frac{1}{2}M(R_1^2 + R_2^2)</math> (b)</p>	 <p>Solid cylinder (or disk) about central axis</p> <p><math>I = \frac{1}{2}MR^2</math> (c)</p>
 <p>Solid cylinder (or disk) about central diameter</p> <p><math>I = \frac{1}{4}MR^2 + \frac{1}{12}ML^2</math> (d)</p>	 <p>Thin rod about axis through center perpendicular to length</p> <p><math>I = \frac{1}{12}ML^2</math> (e)</p>	 <p>Solid sphere about any diameter</p> <p><math>I = \frac{2}{5}MR^2</math> (f)</p>
 <p>Thin spherical shell about any diameter</p> <p><math>I = \frac{2}{3}MR^2</math> (g)</p>	 <p>Hoop about any diameter</p> <p><math>I = \frac{1}{2}MR^2</math> (h)</p>	 <p>Slab about perpendicular axis through center</p> <p><math>I = \frac{1}{12}M(a^2 + b^2)</math> (i)</p>

## Sample problem: Rotational KE

Large machine components that undergo prolonged, high-speed rotation are first examined for the possibility of failure in a *spin test system*. In this system, a component is *spun up* (brought up to high speed) while inside a cylindrical arrangement of lead bricks and containment liner, all within a steel shell that is closed by a lid clamped into place. If the rotation causes the component to shatter, the soft lead bricks are supposed to catch the pieces for later analysis.

In 1985, Test Devices, Inc. ([www.testdevices.com](http://www.testdevices.com)) was spin testing a sample of a solid steel rotor (a disk) of mass  $M = 272$  kg and radius  $R = 38.0$  cm. When the sample reached an angular speed  $\omega$  of 14 000 rev/min, the test engineers heard a dull thump from the test system, which was located one floor down and one room over from them. Investigating, they found that lead bricks had been thrown out in the hallway leading to the test room, a door to the room had been hurled into the adjacent parking lot, one lead brick had shot from the test site through the wall of a neighbor's kitchen, the structural beams of the test building had been damaged, the concrete floor beneath the spin chamber had been shoved downward by about 0.5 cm, and the 900 kg lid had been blown upward through the ceiling and had then crashed back onto the test equipment (Fig. 10-15). The exploding pieces had not penetrated the room of the test engineers only by luck.

How much energy was released in the explosion of the rotor?

### KEY IDEA

The released energy was equal to the rotational kinetic energy  $K$  of the rotor just as it reached the angular speed of 14 000 rev/min.



**Fig. 10-15** Some of the destruction caused by the explosion of a rapidly rotating steel disk. (Courtesy Test Devices, Inc.)

**Calculations:** We can find  $K$  with Eq. 10-34 ( $K = \frac{1}{2}I\omega^2$ ), but first we need an expression for the rotational inertia  $I$ . Because the rotor was a disk that rotated like a merry-go-round,  $I$  is given by the expression in Table 10-2c ( $I = \frac{1}{2}MR^2$ ). Thus, we have

$$I = \frac{1}{2}MR^2 = \frac{1}{2}(272 \text{ kg})(0.38 \text{ m})^2 = 19.64 \text{ kg} \cdot \text{m}^2.$$

The angular speed of the rotor was


$$\begin{aligned}\omega &= (14\,000 \text{ rev/min})(2\pi \text{ rad/rev})\left(\frac{1 \text{ min}}{60 \text{ s}}\right) \\ &= 1.466 \times 10^3 \text{ rad/s.}\end{aligned}$$

Now we can use Eq. 10-34 to write

$$\begin{aligned}K &= \frac{1}{2}I\omega^2 = \frac{1}{2}(19.64 \text{ kg} \cdot \text{m}^2)(1.466 \times 10^3 \text{ rad/s})^2 \\ &= 2.1 \times 10^7 \text{ J.}\end{aligned}\quad (\text{Answer})$$


Being near this explosion was quite dangerous.

# 10.8: Torque

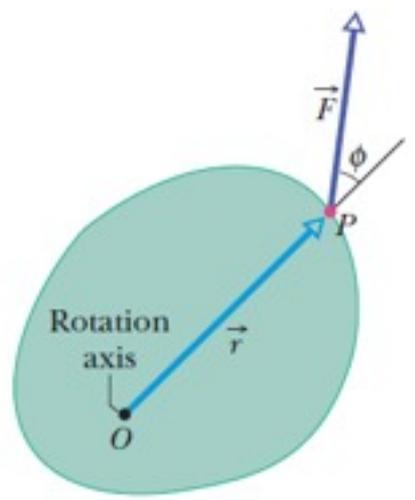


The torque due to this force causes rotation around this axis (which extends out toward you).

(a)

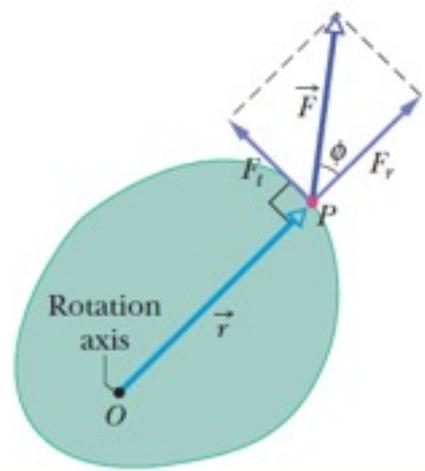

But actually only the *tangential* component of the force causes the rotation.

(b)

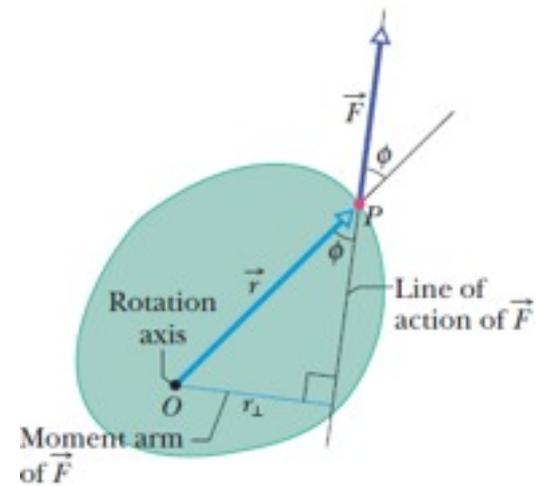

You calculate the same torque by using this moment arm distance and the full force magnitude.

(c)

The ability of a force  $F$  to rotate the body depends on both the magnitude of its tangential component  $F_t$  and also on just how far from the rotation axis the force is applied.

To include both these factors, a quantity called **torque**  $\tau$  is defined as:

$$\tau = (r)(F \sin \phi), \quad \text{or,}$$

$$\tau = (r)(F \sin \phi) = rF_t$$

$$\tau = (r \sin \phi)(F) = r_{\perp}F,$$

where  $r_{\perp}$  is called the moment arm of  $F$ .

## 10.9: Newton's Second Law for Rotation

$$\tau_{\text{net}} = I\alpha \quad (\text{radian measure})$$


$$F_t = ma_t$$

$$\tau = F_t r = ma_t r.$$

$$\tau = m(\alpha r)r = (mr^2)\alpha.$$

$$\tau = I\alpha$$



The torque due to the tangential component of the force causes an angular acceleration around the rotation axis.

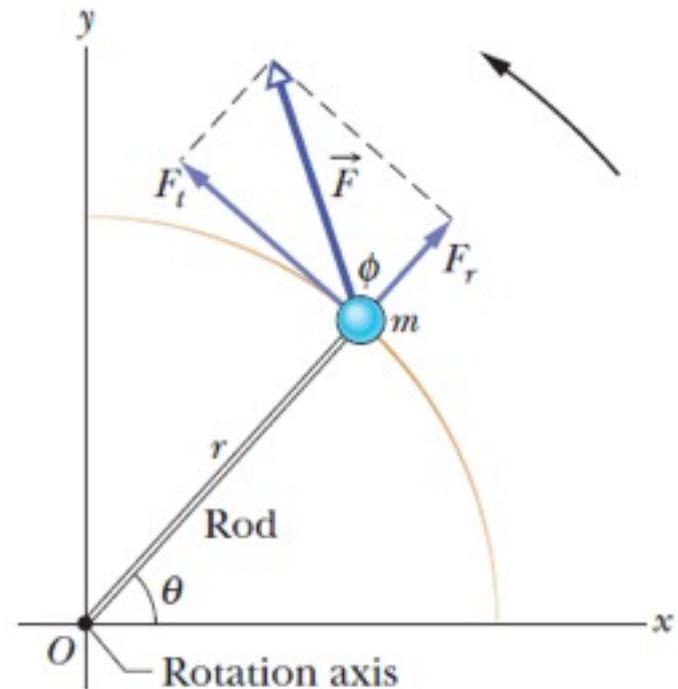

## Sample problem: Newton's 2<sup>nd</sup> Law in Rotational Motion


Figure 10-18*a* shows a uniform disk, with mass  $M = 2.5$  kg and radius  $R = 20$  cm, mounted on a fixed horizontal axle. A block with mass  $m = 1.2$  kg hangs from a massless cord that is wrapped around the rim of the disk. Find the acceleration of the falling block, the angular acceleration of the disk, and the tension in the cord. The cord does not slip, and there is no friction at the axle.

Determine the tension on the cord, the acceleration of the block and the angular acceleration of the disk.

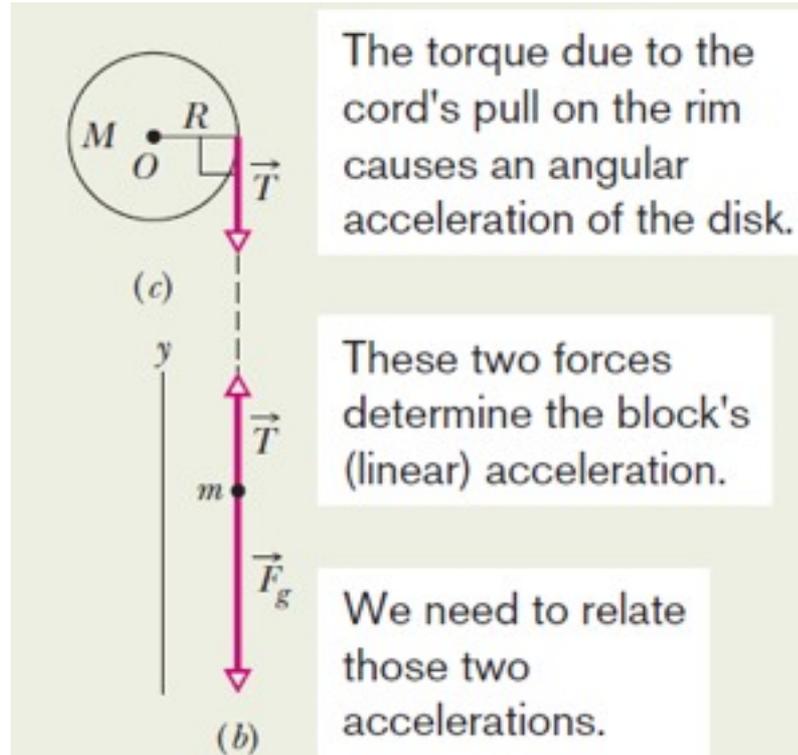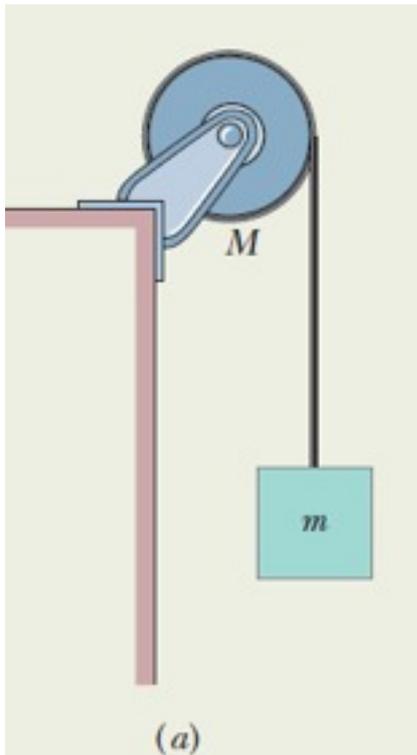

## Sample problem: Newton's 2<sup>nd</sup> Law in Rotational Motion

Figure 10-18a shows a uniform disk, with mass  $M = 2.5$  kg and radius  $R = 20$  cm, mounted on a fixed horizontal axle. A block with mass  $m = 1.2$  kg hangs from a massless cord that is wrapped around the rim of the disk. Find the acceleration of the falling block, the angular acceleration of the disk, and the tension in the cord. The cord does not slip, and there is no friction at the axle.

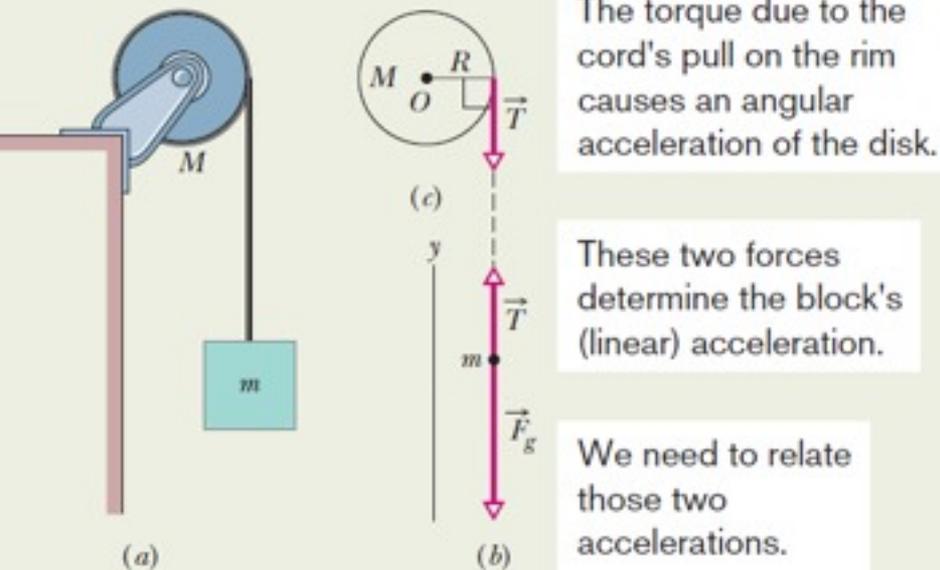

Determine the tension on the cord, the acceleration of the block and the angular acceleration of the disk.

### Forces on block:

From the block's free body diagram, we can write Newton's second law for components along a vertical  $y$  axis:  $T - mg = ma$ .

The torque from the tension force,  $T$ , is  $-RT$ , negative because the torque rotates the disk clockwise from rest.

The rotational inertia  $I$  of the disk is  $\frac{1}{2}MR^2$ . But  $\tau_{net} = I\alpha$  or:

$$-RT = \frac{1}{2} MR^2 \alpha .$$

Because the cord does not slip, the linear acceleration  $a$  of the block and the (tangential) linear acceleration  $a_t$  of the rim of the disk are equal.

We now have:

$$T = -\frac{1}{2} Ma .$$

### Combining results:

$$a = -g \frac{2m}{M + 2m} = -(9.8 \text{ m/s}^2) \frac{(2)(1.2 \text{ kg})}{2.5 \text{ kg} + (2)(1.2 \text{ kg})} = -4.8 \text{ m/s}^2 . \quad (\text{Answer})$$

We then find  $T$ :

$$T = -\frac{1}{2} Ma = -\frac{1}{2}(2.5 \text{ kg})(-4.8 \text{ m/s}^2) = 6.0 \text{ N} . \quad (\text{Answer})$$

The angular acceleration of the disk is:

$$\alpha = \frac{a}{R} = \frac{-4.8 \text{ m/s}^2}{0.20 \text{ m}} = -24 \text{ rad/s}^2 . \quad (\text{Answer})$$

Note that the acceleration  $a$  of the falling block is less than  $g$ , and tension  $T$  in the cord ( $= 6.0$  N) is less than the gravitational force on the hanging block ( $mg = 11.8$  N).

## 10.10: Work and Rotational Kinetic Energy

$$\Delta K = K_f - K_i = \frac{1}{2}I\omega_f^2 - \frac{1}{2}I\omega_i^2 = W \quad (\text{work-kinetic energy theorem}).$$

$$W = \int_{\theta_i}^{\theta_f} \tau d\theta \quad (\text{work, rotation about fixed axis}),$$

where  $\tau$  is the torque doing the work  $W$ , and  $\theta_i$  and  $\theta_f$  are the body's angular positions before and after the work is done, respectively. When  $\tau$  is constant,

$$W = \tau(\theta_f - \theta_i) \quad (\text{work, constant torque})$$

The rate at which the work is done is the power

$$P = \frac{dW}{dt} = \tau\omega \quad (\text{power, rotation about fixed axis})$$

## Parallels between linear and rotational dynamics


**TABLE 10-3**

### Some Corresponding Relations for Translational and Rotational Motion

Pure Translation (Fixed Direction)		Pure Rotation (Fixed Axis)	
Position	$x$	Angular position	$\theta$
Velocity	$v = dx/dt$	Angular velocity	$\omega = d\theta/dt$
Acceleration	$a = dv/dt$	Angular acceleration	$\alpha = d\omega/dt$
Mass	$m$	Rotational inertia	$I$
Newton's second law	$F_{\text{net}} = ma$	Newton's second law	$\tau_{\text{net}} = I\alpha$
Work	$W = \int F dx$	Work	$W = \int \tau d\theta$
Kinetic energy	$K = \frac{1}{2}mv^2$	Kinetic energy	$K = \frac{1}{2}I\omega^2$
Power (constant force)	$P = Fv$	Power (constant torque)	$P = \tau\omega$
Work-kinetic energy theorem	$W = \Delta K$	Work-kinetic energy theorem	$W = \Delta K$

## Sample problem: Work, Rotational KE, Torque

Let the disk in Fig. 10-18 start from rest at time  $t = 0$  and also let the tension in the massless cord be  $6.0 \text{ N}$  and the angular acceleration of the disk be  $-24 \text{ rad/s}^2$ . What is its rotational kinetic energy  $K$  at  $t = 2.5 \text{ s}$ ?

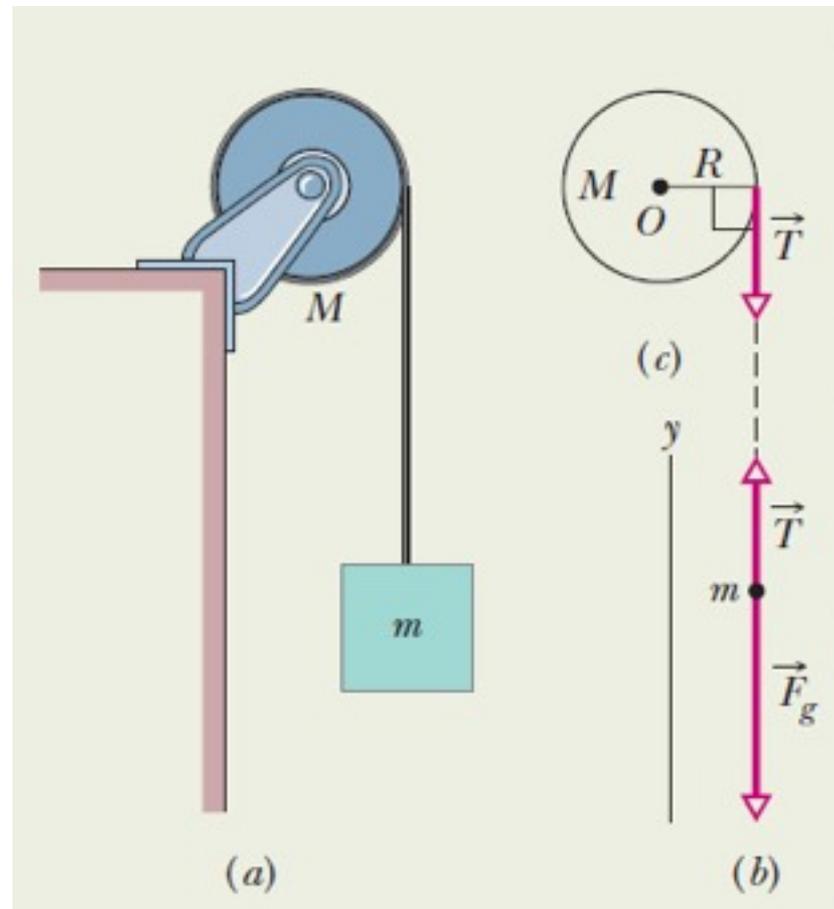


Let the disk in Fig. 10-18 start from rest at time  $t = 0$  and also let the tension in the massless cord be  $6.0 \text{ N}$  and the angular acceleration of the disk be  $-24 \text{ rad/s}^2$ . What is its rotational kinetic energy  $K$  at  $t = 2.5 \text{ s}$ ?

**Calculations:** Because we want  $\omega$  and know  $\alpha$  and  $\omega_0 (= 0)$ , we use Eq. 10-12:

$$\omega = \omega_0 + \alpha t = 0 + \alpha t = \alpha t.$$

Substituting  $\omega = \alpha t$  and  $I = \frac{1}{2}MR^2$  into Eq. 10-34, we find

$$\begin{aligned} K &= \frac{1}{2}I\omega^2 = \frac{1}{2}\left(\frac{1}{2}MR^2\right)(\alpha t)^2 = \frac{1}{4}M(R\alpha t)^2 \\ &= \frac{1}{4}(2.5 \text{ kg})[(0.20 \text{ m})(-24 \text{ rad/s}^2)(2.5 \text{ s})]^2 \\ &= 90 \text{ J.} \end{aligned} \quad \text{(Answer)}$$

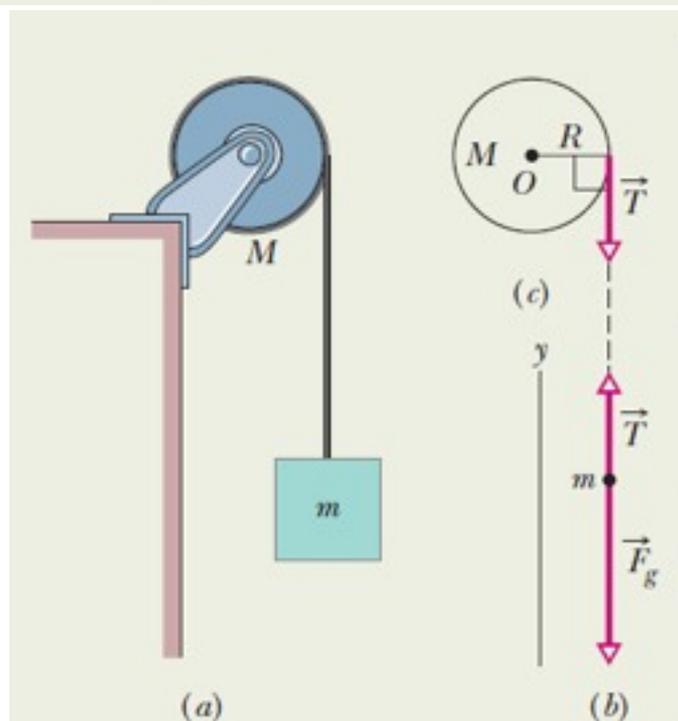

We can also get this answer by finding the disk's kinetic energy from the work done on the disk.

**Calculations:** First, we relate the *change* in the kinetic energy of the disk to the net work  $W$  done on the disk, using the work–kinetic energy theorem of Eq. 10-52 ( $K_f - K_i = W$ ). With  $K$  substituted for  $K_f$  and  $0$  for  $K_i$ , we get

$$K = K_i + W = 0 + W = W. \quad (10-60)$$

Next we want to find the work  $W$ . We can relate  $W$  to the torques acting on the disk with Eq. 10-53 or 10-54. The only torque causing angular acceleration and doing work is the torque due to force  $\vec{T}$  on the disk from the cord, which is equal to  $-TR$ . Because  $\alpha$  is constant, this torque also must be constant. Thus, we can use Eq. 10-54 to write

$$W = \tau(\theta_f - \theta_i) = -TR(\theta_f - \theta_i). \quad (10-61)$$

Because  $\alpha$  is constant, we can use Eq. 10-13 to find  $\theta_f - \theta_i$ . With  $\omega_i = 0$ , we have

$$\theta_f - \theta_i = \omega_i t + \frac{1}{2}\alpha t^2 = 0 + \frac{1}{2}\alpha t^2 = \frac{1}{2}\alpha t^2.$$

Now we substitute this into Eq. 10-61 and then substitute the result into Eq. 10-60. Inserting the given values  $T = 6.0 \text{ N}$  and  $\alpha = -24 \text{ rad/s}^2$ , we have

$$\begin{aligned} K &= W = -TR(\theta_f - \theta_i) = -TR\left(\frac{1}{2}\alpha t^2\right) = -\frac{1}{2}TR\alpha t^2 \\ &= -\frac{1}{2}(6.0 \text{ N})(0.20 \text{ m})(-24 \text{ rad/s}^2)(2.5 \text{ s})^2 \\ &= 90 \text{ J.} \end{aligned} \quad \text{(Answer)}$$